


OTIN

227-032411012140050

OTIN XL SQUARE PRO SD SURFACE MOUNTED DOWNLIGHT made of aluminium, white, similar to RAL 9016, decor Faceted plastic reflector white matt, opal diffuser beam Wide beam (BS), light output direct, UGR <22, with converter, max. 200mA, dimmability: not dimmable, through wiring 2,5mm², IP40 with X-Change light source, replaceable without tools,



SKETCH

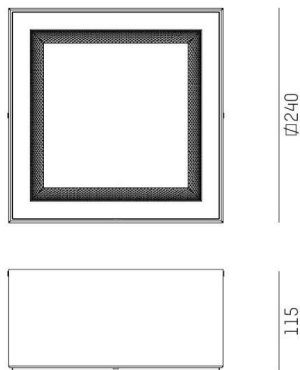

TECHNICAL DETAILS


Light source	LED
System performance [W]	8,5
Luminous flux [lm]	1460
Current sec. [mA]	200
Colour temperature	4000K
CRI	>80
UGR	<22
Optics	opal diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	Wide beam (BS)
Voltage	220-240V 50/60Hz
Through wiring	2,5mm ²

Length [mm]	240
Width [mm]	240
Height [mm]	115
IP protection class	IP40
IP protection class	protection cl. I
IK value	IK02

Material	aluminium
Colour of body	white
RAL	9016
Colour of decor	Faceted plastic reflector white matt
Lifetime [h]	L90 B10 100 000
Energy efficiency class	B
Number of luminaires B16A	65

Net weight [kg]	2.43
EAN number	9010979323162

LIGHT DISTRIBUTION CURVE

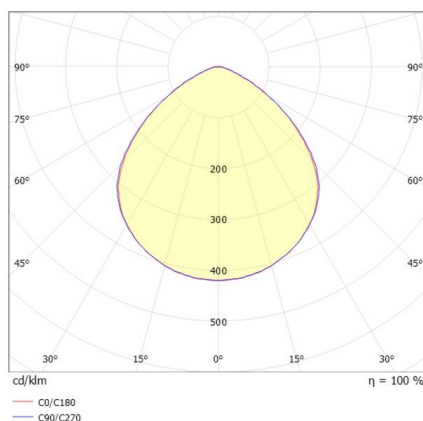

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.