


OTIN

227-012313022140050

OTIN L SQUARE PRO R RECESSED DOWNLIGHT made of aluminium, white, similar to RAL 9016, decor Faceted plastic reflector high-gloss, opal diffuser beam Wide beam (BS), light output direct, UGR <25, with converter, max. 300mA, dimmability: not dimmable, through wiring 2,5mm², IP54/IP20 with X-Change light source, replaceable without tools,



SKETCH

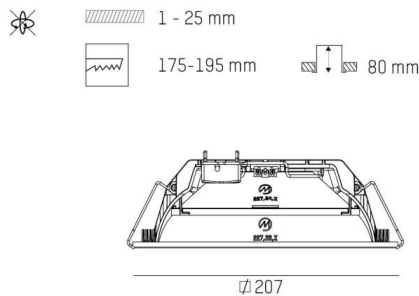

TECHNICAL DETAILS


Light source LED
 System performance [W] 11,5
 Luminous flux [lm] 2070
 Current sec. [mA] 300
 Colour temperature 4000K
 CRI >80
 UGR <25
 Optics opal diffuser
 Converter with converter
 Dimmability not dimmable
 Light emission area direct
 Beam angle [°] Wide beam (BS)
 Voltage 220-240V AC/DC
 Through wiring 2,5mm²

Length [mm] 207
 Width [mm] 207
 Height [mm] 63
 Ceiling cutout [mm] 175-195
 Ceiling thickness [mm] 1-25
 Mounting depth [mm] 80
 IP protection class IP54/IP20
 IK value protection cl. II
 IK02

Material aluminium
 Colour of body white
 RAL 9016
 Colour of decor Faceted plastic reflector high-gloss
 Lifetime [h] L90 B10 100 000
 Energy efficiency class B
 Number of luminaires B16A 49

Net weight [kg] 0.71
 EAN number 9010979032804

LIGHT DISTRIBUTION CURVE

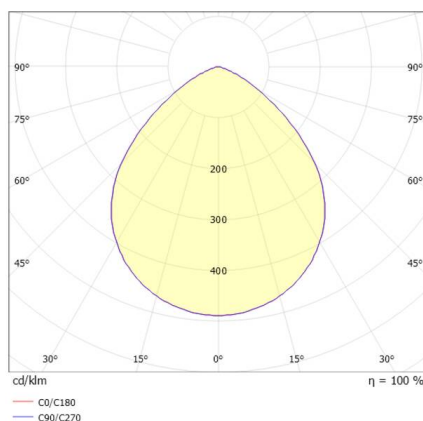

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.

Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.