


OTIN

227-032313022140050

OTIN L SQUARE PRO SD SURFACE MOUNTED DOWNLIGHT made of aluminium, white, similar to RAL 9016, decor Faceted plastic reflector high-gloss, opal diffuser beam Wide beam (BS), light output direct, UGR <25, with converter, max. 300mA, dimmability: not dimmable, through wiring 2,5mm², IP40 with X-Change light source, replaceable without tools,




SKETCH

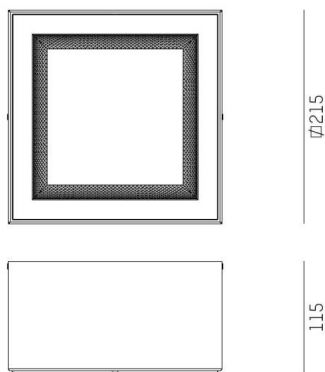

TECHNICAL DETAILS

Light source	LED
System performance [W]	12
Luminous flux [lm]	2070
Current sec. [mA]	300
Colour temperature	4000K
CRI	>80
UGR	<25
Optics	opal diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	Wide beam (BS)
Voltage	220-240V 50/60Hz
Through wiring	2,5mm ²
Length [mm]	215
Width [mm]	215
Height [mm]	115
IP protection class	IP40
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	white
RAL	9016
Colour of decor	Faceted plastic reflector high-gloss
Lifetime [h]	L90 B10 100 000
Energy efficiency class	B
Number of luminaires B16A	65
Net weight [kg]	2.18
EAN number	9010979420724

LIGHT DISTRIBUTION CURVE

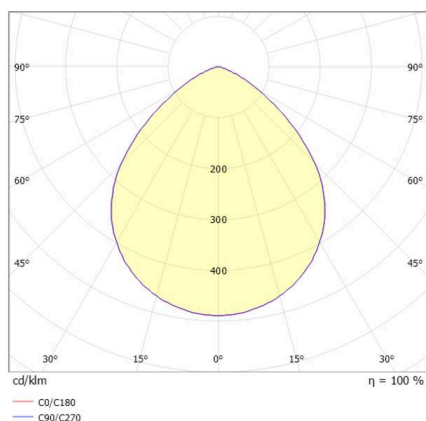

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.