


## ROGGA

147-0912309240499660

ROGGA SPHERE RPD SUSPENSION made of aluminium, black, similar to RAL 9005, decor black, high-efficiently vacuum deposited aluminium reflector beam 50°, light output direct, without converter, max. 300mA, dimmability: see converter, cable black, adapter/ceiling base black, pendant length 1500mm, IP20




## SKETCH

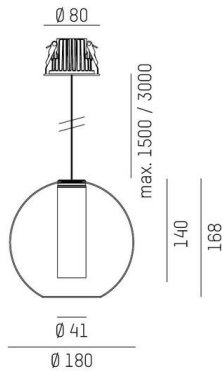

## TECHNICAL DETAILS

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Light source                     | LED 10W                              |
| System performance [W]           | 11,5                                 |
| Luminous flux [lm]               | 1150                                 |
| Current sec. [mA]                | 300                                  |
| Colour temperature               | 3000K                                |
| CRI                              | PREMIUM >90                          |
| Optics                           | vacuum deposited aluminium reflector |
| Converter                        | without converter                    |
| Dimmability                      | see converter                        |
| Light emission area              | direct                               |
| Beam angle                       | 50°                                  |
| Height [mm]                      | 168                                  |
| Length pendant [mm]              | 1500                                 |
| Diameter [mm]                    | 180                                  |
| Ceiling cutout [mm]              | 68                                   |
| Ceiling thickness [mm]           | 1-25                                 |
| Mounting depth [mm]              | 100                                  |
| IP protection class              | IP20                                 |
| IP protection class              | protection cl. II                    |
| Material                         | aluminium                            |
| Colour of body                   | black                                |
| RAL                              | 9005                                 |
| Colour of adapter / ceiling base | black                                |
| Colour of decor                  | black                                |
| Cable                            | black                                |
| Lifetime [h]                     | L80 B10 50 000                       |
| Energy efficiency class          | E                                    |
| Net weight [kg]                  | 1.00                                 |
| EAN number                       | 9010979404564                        |

## LIGHT DISTRIBUTION CURVE

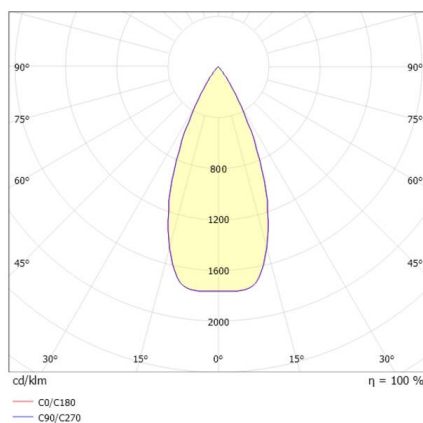

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.