


LOG 2.1


728-60703361406d

LOG 2.1 SYSTEM EINSATZ BINA LENS LIGHT INSERT made of aluminium, black, similar to RAL 9005, lens optic with anti-glare grid beam 65°, light output direct, UGR <19, with converter, max. 700mA, dimmability: DALI, through wiring 3x1,5mm² + 2x0,75mm², IP20

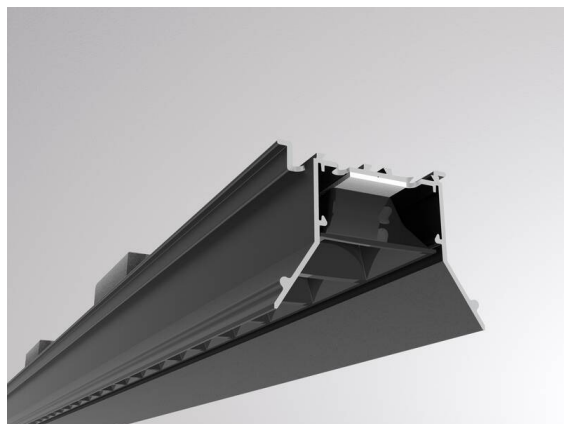

SKETCH

DIRECT BEAM

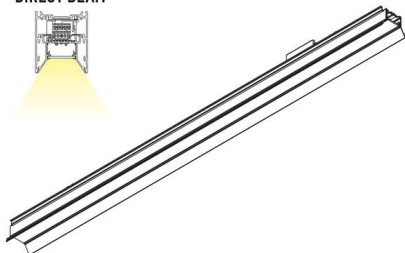

TECHNICAL DETAILS

Light source	LED
System performance [W]	32
Luminous flux [lm]	3490
Current sec. [mA]	700
Colour temperature	4000K
CRI	>80
UGR	<19
Optics	lens optics with glare control louvre
Converter	with converter
Dimmability	DALI
Light emission area	direct
Beam angle	65°
Voltage	220-240V 50/60Hz
Through wiring	3x1,5mm² + 2x0,75mm²
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	50
Net weight [kg]	1.68
EAN number	9010506208696



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.