


## LOG 2.1


728-607043613060

LOG 2.1 SYSTEM EINSATZ BINA LENS LIGHT INSERT made of aluminium, black, similar to RAL 9005, lens optic with anti-glare grid beam 65°, light output direct, UGR <19, with converter, max. 950mA, dimmability: not dimmable, through wiring 3x1,5mm², IP20

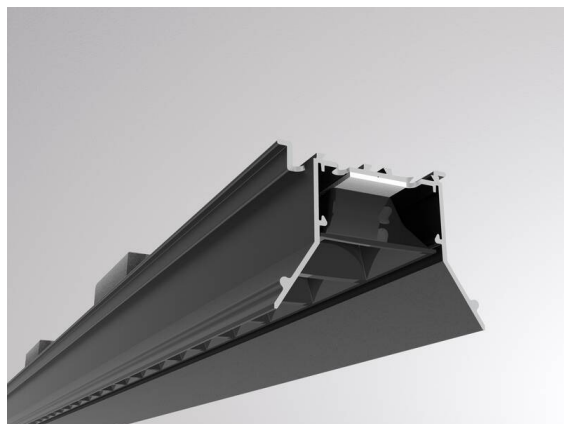

## SKETCH

DIRECT BEAM

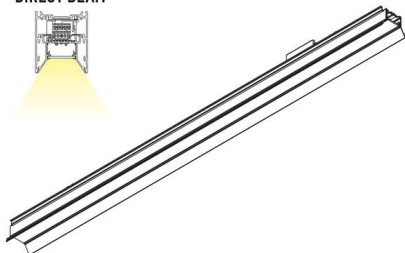

## TECHNICAL DETAILS

|                           |                                       |
|---------------------------|---------------------------------------|
| Light source              | LED                                   |
| System performance [W]    | 43                                    |
| Luminous flux [lm]        | 4370                                  |
| Current sec. [mA]         | 950                                   |
| Colour temperature        | 2700K                                 |
| CRI                       | >80                                   |
| UGR                       | <19                                   |
| Optics                    | lens optics with glare control louvre |
| Converter                 | with converter                        |
| Dimmability               | not dimmable                          |
| Light emission area       | direct                                |
| Beam angle                | 65°                                   |
| Voltage                   | 220-240V 50/60Hz                      |
| Through wiring            | 3x1,5mm²                              |
| IP protection class       | IP20                                  |
| IP protection class       | protection cl. I                      |
| Material                  | aluminium                             |
| Colour of body            | black                                 |
| RAL                       | 9005                                  |
| Lifetime [h]              | L80 B10 50 000                        |
| Energy efficiency class   | D                                     |
| Number of luminaires B16A | 50                                    |
| Net weight [kg]           | 2.14                                  |
| EAN number                | 9010506205022                         |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.