

**TRAIL**

**610-1252031419050**

TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, white, similar to RAL 9016, linear optics beam 30°, light output direct, UGR <28, with converter, max. 600mA, dimmability: not dimmable, through wiring 7-polig, IP20



**TECHNICAL DETAILS**


Light source	LED
System performance [W]	92
Luminous flux [lm]	13550
Current sec. [mA]	600
Colour temperature	3000K
CRI	>80
UGR	<28
Optics	high quality linear optics
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	30°
Voltage	220-240V 50/60Hz
Through wiring	7-polig

Length [mm]	1696
Width [mm]	64
Height [mm]	16
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK06

Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	L90 B10 70 000
Ambient temperature	from -20° to +50°
Energy efficiency class	C
Number of luminaires B16A	22
IFS	True


Net weight [kg]	1.62
EAN number	9010506601572

**SKETCH**



Energy label

**LIGHT DISTRIBUTION CURVE**

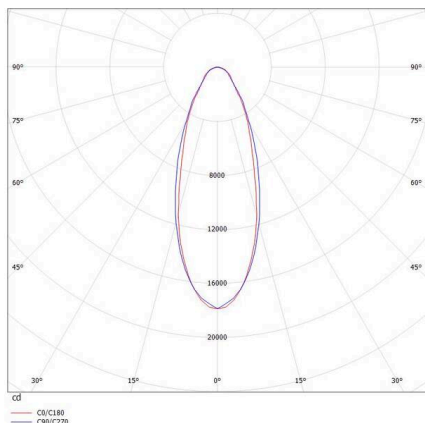

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.