


TRAIL

610-1251031417040

TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, grey, similar to RAL 9006, linear optics beam 30°, light output direct, UGR <28, with converter, max. 600mA, dimmability: not dimmable, through wiring 7-polig, IP20

SKETCH



TECHNICAL DETAILS


| | |
|------------------------|----------------------------|
| Light source | LED |
| System performance [W] | 61 |
| Luminous flux [lm] | 8200 |
| Current sec. [mA] | 600 |
| Colour temperature | 3500K |
| CRI | >80 |
| UGR | <28 |
| Optics | high quality linear optics |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct |
| Beam angle | 30° |
| Voltage | 220-240V 50/60Hz |
| Through wiring | 7-polig |

| | |
|---------------------|------------------|
| Length [mm] | 1137 |
| Width [mm] | 64 |
| Height [mm] | 16 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| IK value | IK06 |

| | |
|---------------------------|-------------------|
| Material | aluminium |
| Colour of body | grey |
| RAL | 9006 |
| Lifetime [h] | L90 B10 70 000 |
| Ambient temperature | from -20° to +50° |
| Energy efficiency class | C |
| Number of luminaires B16A | 22 |
| IFS | True |

| | |
|-----------------|---------------|
| Net weight [kg] | 1.17 |
| EAN number | 9010506594287 |

LIGHT DISTRIBUTION CURVE

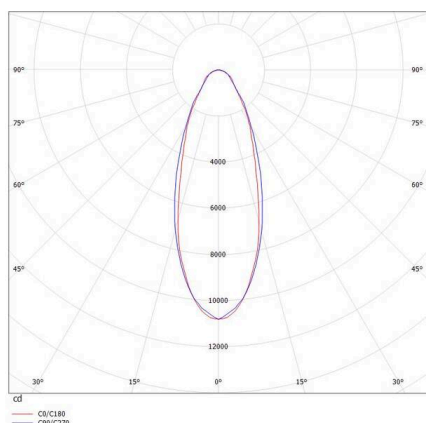

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.