


TRAIL

610-130005152444d

TRAIL MOVA M MOUNTING RAIL LIGHT INSERT made of aluminium, grey, similar to RAL 9006, decor grey, high-efficiently vacuum deposited aluminium reflector without safety glass beam 24°, light output direct, swiveling 350, tilting 90, with converter, max. 1050mA, dimmability: DALI 2 DATA, through wiring 7-polig, adapter/ceiling base grey, IP20




SKETCH

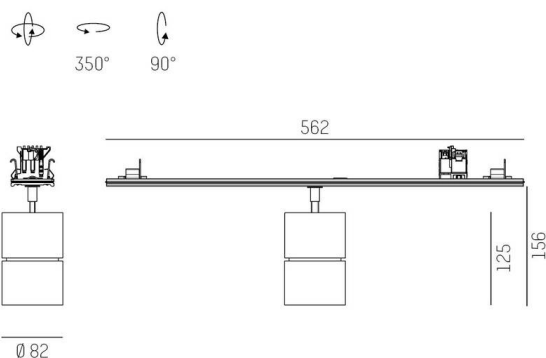

TECHNICAL DETAILS

Light source	LED
System performance [W]	40
Luminous flux [lm]	4880
Current sec. [mA]	1050
Colour temperature	4000K
CRI	>90
Optics	aluminium reflector without protection glass
Converter	with converter
Dimmability	DALI 2 DATA
Light emission area	direct
Beam angle	24°
Voltage	220-240V 50/60Hz
Through wiring	7-polig
Length [mm]	564,9
Height [mm]	156
Diameter [mm]	82
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	grey
RAL	9006
Colour of adapter / ceiling base	grey
Colour of decor	grey
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	50
Net weight [kg]	0.96
EAN number	9010870134706

LIGHT DISTRIBUTION CURVE

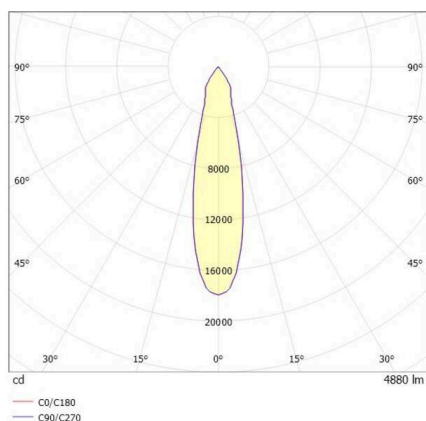

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.