


## TRAIL

610-130005152455d


TRAIL MOVA M MOUNTING RAIL LIGHT INSERT made of aluminium, white, similar to RAL 9016, decor white, high-efficiently vacuum deposited aluminium reflector without safety glass beam 24°, light output direct, swiveling 350, tilting 90, with converter, max. 1050mA, dimmability: DALI 2 DATA, through wiring 7-polig, adapter/ceiling base white, IP20



## SKETCH

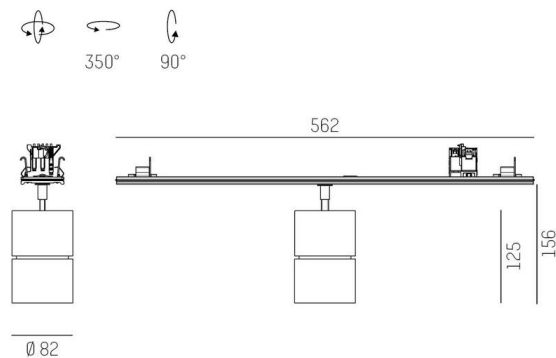

## LIGHT DISTRIBUTION CURVE

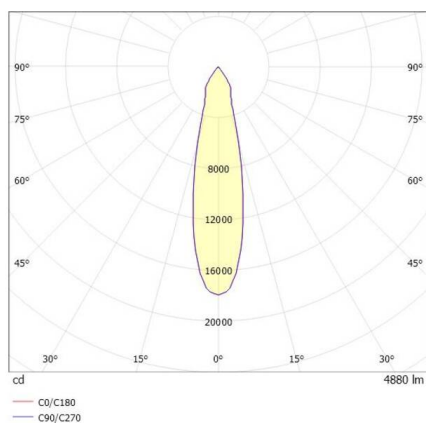

## TECHNICAL DETAILS

|                                  |                                              |
|----------------------------------|----------------------------------------------|
| Light source                     | LED                                          |
| System performance [W]           | 40                                           |
| Luminous flux [lm]               | 4880                                         |
| Current sec. [mA]                | 1050                                         |
| Colour temperature               | 4000K                                        |
| CRI                              | >90                                          |
| Optics                           | aluminium reflector without protection glass |
| Converter                        | with converter                               |
| Dimmability                      | DALI 2 DATA                                  |
| Light emission area              | direct                                       |
| Beam angle                       | 24°                                          |
| Voltage                          | 220-240V 50/60Hz                             |
| Through wiring                   | 7-polig                                      |
| Length [mm]                      | 562                                          |
| Height [mm]                      | 156                                          |
| Diameter [mm]                    | 82                                           |
| IP protection class              | IP20                                         |
| IP protection class              | protection cl. I                             |
| Material                         | aluminium                                    |
| Colour of body                   | white                                        |
| RAL                              | 9016                                         |
| Colour of adapter / ceiling base | white                                        |
| Colour of decor                  | white                                        |
| Lifetime [h]                     | L80 B10 50 000                               |
| Energy efficiency class          | D                                            |
| Number of luminaires B16A        | 50                                           |
| Net weight [kg]                  | 0.95                                         |
| EAN number                       | 9010870134720                                |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.