


**TRAIL**

**610-1252031415040**

TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, grey, similar to RAL 9006, linear optics beam 30°, light output direct, UGR <28, with converter, max. 600mA, dimmability: not dimmable, through wiring 7-polig, IP20

**SKETCH**



**TECHNICAL DETAILS**


|                        |                            |
|------------------------|----------------------------|
| Light source           | LED                        |
| System performance [W] | 92                         |
| Luminous flux [lm]     | 12970                      |
| Current sec. [mA]      | 600                        |
| Colour temperature     | 5000K                      |
| CRI                    | >80                        |
| UGR                    | <28                        |
| Optics                 | high quality linear optics |
| Converter              | with converter             |
| Dimmability            | not dimmable               |
| Light emission area    | direct                     |
| Beam angle             | 30°                        |
| Voltage                | 220-240V 50/60Hz           |
| Through wiring         | 7-polig                    |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 1696             |
| Width [mm]          | 64               |
| Height [mm]         | 16               |
| IP protection class | IP20             |
| IP protection class | protection cl. I |
| IK value            | IK06             |

|                           |                   |
|---------------------------|-------------------|
| Material                  | aluminium         |
| Colour of body            | grey              |
| RAL                       | 9006              |
| Lifetime [h]              | L90 B10 70 000    |
| Ambient temperature       | from -20° to +50° |
| Energy efficiency class   | C                 |
| Number of luminaires B16A | 22                |
| IFS                       | True              |

|                 |               |
|-----------------|---------------|
| Net weight [kg] | 1.62          |
| EAN number      | 9010506613445 |

**LIGHT DISTRIBUTION CURVE**

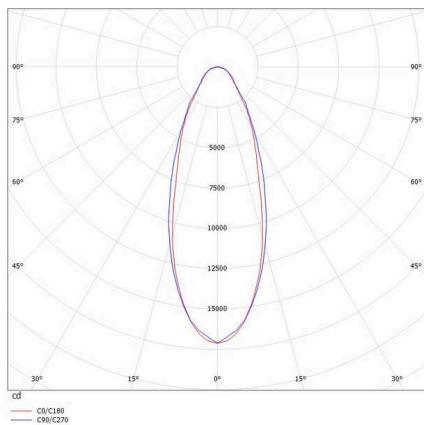

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.