


TRAIL

610-1252011414040

TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, grey, similar to RAL 9006, linear optics beam 30°, light output direct, UGR <25, with converter, max. 250mA, dimmability: not dimmable, through wiring 7-polig, IP20

SKETCH



TECHNICAL DETAILS


Light source	LED
System performance [W]	37
Luminous flux [lm]	5790
Current sec. [mA]	250
Colour temperature	4000K
CRI	>80
UGR	<25
Optics	high quality linear optics
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	30°
Voltage	220-240V 50/60Hz
Through wiring	7-polig

Length [mm]	1696
Width [mm]	64
Height [mm]	16
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK06

Material	aluminium
Colour of body	grey
RAL	9006
Lifetime [h]	L90 B10 100 000
Ambient temperature	from -20° to +50°
Energy efficiency class	C
Number of luminaires B16A	33
IFS	True

Net weight [kg]	1.63
EAN number	9010506596571

LIGHT DISTRIBUTION CURVE

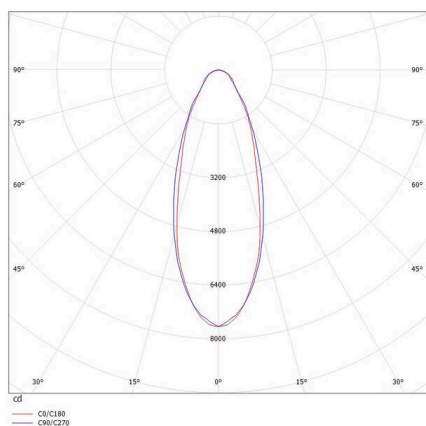

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.