

**TRAIL**

**610-1252011414050**


TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, white, similar to RAL 9016, linear optics beam 30°, light output direct, UGR <25, with converter, max. 250mA, dimmability: not dimmable, through wiring 7-polig, IP20



**TECHNICAL DETAILS**


|                           |                            |
|---------------------------|----------------------------|
| Light source              | LED                        |
| System performance [W]    | 37                         |
| Luminous flux [lm]        | 6380                       |
| Current sec. [mA]         | 250                        |
| Colour temperature        | 4000K                      |
| CRI                       | >80                        |
| UGR                       | <25                        |
| Optics                    | high quality linear optics |
| Converter                 | with converter             |
| Dimmability               | not dimmable               |
| Light emission area       | direct                     |
| Beam angle                | 30°                        |
| Voltage                   | 220-240V 50/60Hz           |
| Through wiring            | 7-polig                    |
| Length [mm]               | 1696                       |
| Width [mm]                | 64                         |
| Height [mm]               | 16                         |
| IP protection class       | IP20                       |
| IP protection class       | protection cl. I           |
| IK value                  | IK06                       |
| Material                  | aluminium                  |
| Colour of body            | white                      |
| RAL                       | 9016                       |
| Lifetime [h]              | L90 B10 100 000            |
| Ambient temperature       | from -20° to +50°          |
| Energy efficiency class   | C                          |
| Number of luminaires B16A | 33                         |
| IFS                       | True                       |
| Net weight [kg]           | 1.63                       |
| EAN number                | 9010506596595              |

**SKETCH**

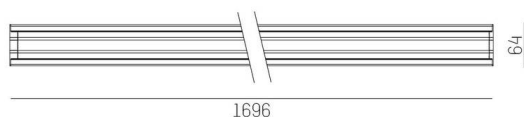

Energy label

**LIGHT DISTRIBUTION CURVE**

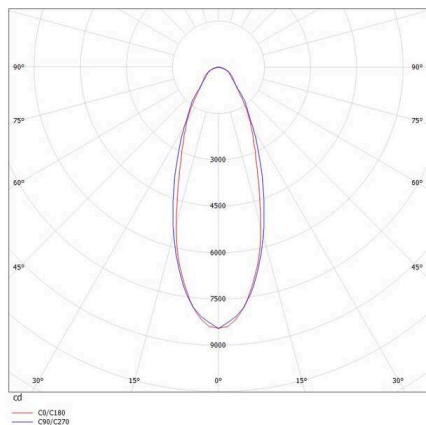

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.