


**TRAIL**

**610-1252031414040**

TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, grey, similar to RAL 9006, linear optics beam 30°, light output direct, UGR <28, with converter, max. 600mA, dimmability: not dimmable, through wiring 7-polig, IP20

**SKETCH**



**TECHNICAL DETAILS**


Light source	LED
System performance [W]	92
Luminous flux [lm]	12970
Current sec. [mA]	600
Colour temperature	4000K
CRI	>80
UGR	<28
Optics	high quality linear optics
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	30°
Voltage	220-240V 50/60Hz
Through wiring	7-polig

Length [mm]	1696
Width [mm]	64
Height [mm]	16
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK06

Material	aluminium
Colour of body	grey
RAL	9006
Lifetime [h]	L90 B10 70 000
Ambient temperature	from -20° to +50°
Energy efficiency class	C
Number of luminaires B16A	22
IFS	True

Net weight [kg]	1.62
EAN number	9010506601374

**LIGHT DISTRIBUTION CURVE**

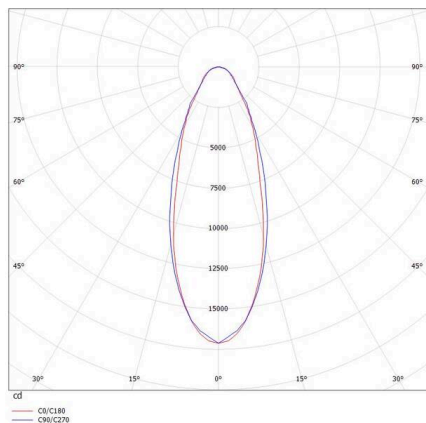

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.