



MUSO

222-00059

MUSO LINEAR SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9003, polycarbonate cover beam 115°, light output direct, with converter, max. 400mA, dimmability: DALI, Push, IP54

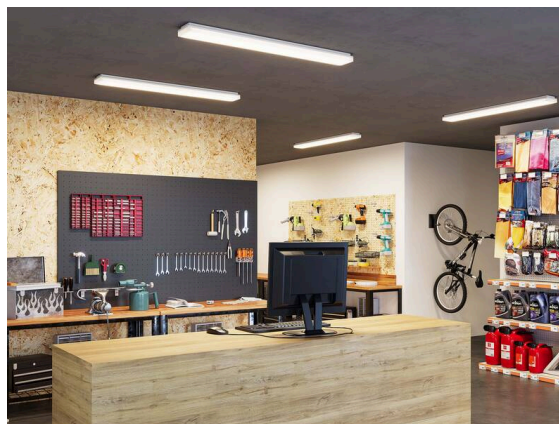


SKETCH

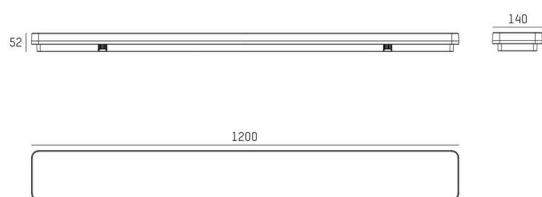

TECHNICAL DETAILS

Light source	LED
System performance [W]	36
Luminous flux [lm]	4980/5260
Current sec. [mA]	400
Colour temperature	3000/4000K
CRI	>80
Optics	polycarbonate cover with converter
Converter	DALI, Push
Dimmability	direct
Light emission area	115°
Beam angle	220-240V 50/60Hz
Voltage	
Length [mm]	1200
Width [mm]	140
Height [mm]	52
IP protection class	IP54
IP protection class	protection cl. II
IK value	IK08
Material	synthetic
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	43
Net weight [kg]	2.63
EAN number	9010870300088

LIGHT DISTRIBUTION CURVE

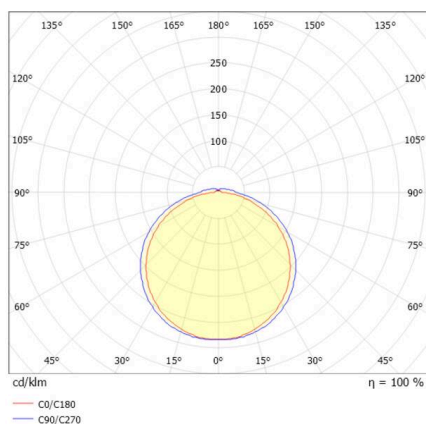

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.