



MUSO

222-00066

MUSO LINEAR SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9003, polycarbonate cover beam 120°, light output direct, with converter, max. 145mA, dimmability: not dimmable, IP54

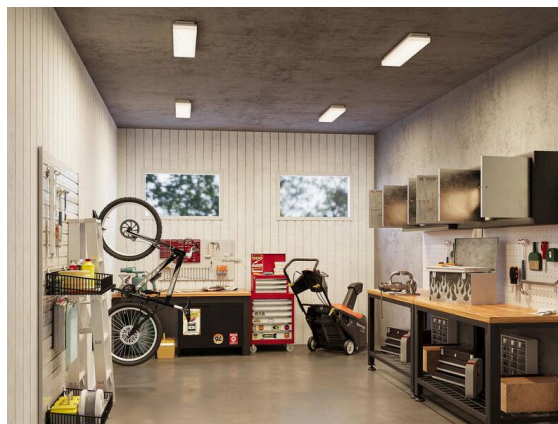


SKETCH

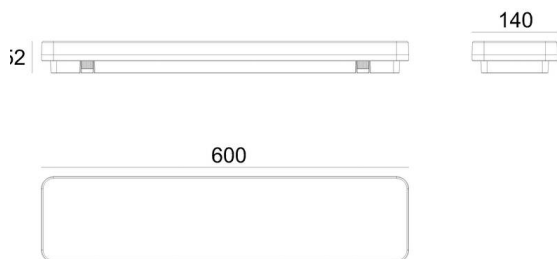

TECHNICAL DETAILS

Light source	LED
System performance [W]	18
Luminous flux [lm]	2450/2560
Current sec. [mA]	145
Colour temperature	3000/4000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	120°
Voltage	220-240V 50/60Hz
Length [mm]	600
Width [mm]	140
Height [mm]	52
IP protection class	IP54
IP protection class	protection cl. II
IK value	IK08
Material	synthetic
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Net weight [kg]	1.35
EAN number	9010870300750

LIGHT DISTRIBUTION CURVE

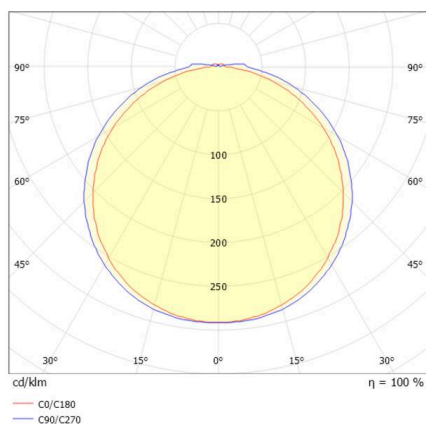

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.