


NONA

333-00044


NONA MINI SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, lens beam 48°, light output direct, UGR <16, with converter, max. 300mA, dimmability: on/off, IP65



SKETCH

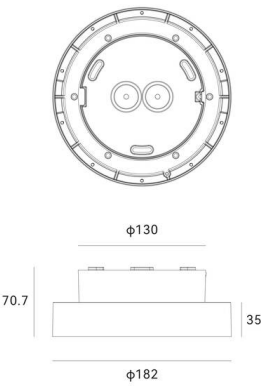

LIGHT DISTRIBUTION CURVE

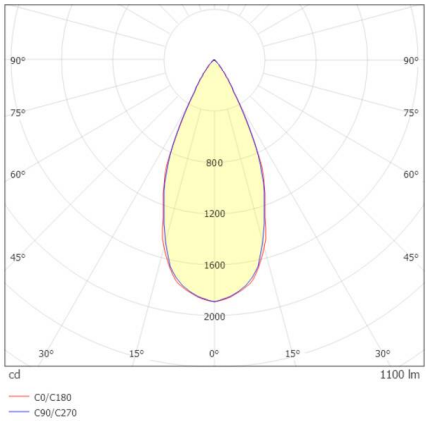

TECHNICAL DETAILS

Light source	LED
System performance [W]	12,5
Luminous flux [lm]	1100
Current sec. [mA]	300
Colour temperature	3000K
CRI	>80
UGR	<16
Optics	lens
Converter	with converter
Dimmability	on/off
Light emission area	direct
Beam angle	48°
Voltage	220-240V 50/60Hz
Height [mm]	71
Diameter [mm]	182
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK05
Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	60
Net weight [kg]	0.86
EAN number	9010870414228



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.