


PERFORA PRO

222-00157


PERFORA PRO L SUSPENSION made of aluminium, black, similar to RAL 9005, lens optic with anti-glare grid light output direct / indirect 40:60, UGR <19, with converter, max. 1100mA, dimmability: DALI 2, Push, cable transparent, adapter/ceiling base black, pendant length 4000mm, IP20



SKETCH

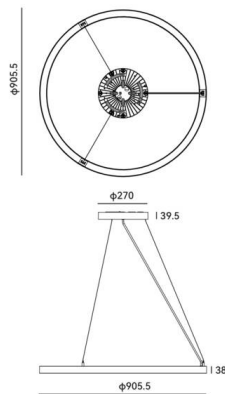

LIGHT DISTRIBUTION CURVE

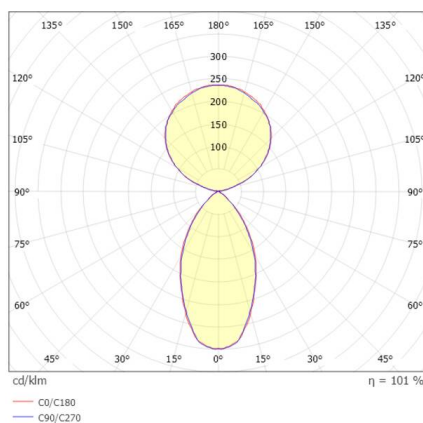

TECHNICAL DETAILS

Light source	LED
System performance [W]	60
Luminous flux [lm]	6800/7070
Current sec. [mA]	1100
Colour temperature	2700/3000K
CRI	>90
UGR	<19
Optics	lens optics with glare control louvre
Converter	with converter
Dimmability	DALI 2, Push
Light emission area	direct / indirect 40:60
Voltage	220-240V 50/60Hz
Height [mm]	38
Length pendant [mm]	4000
Diameter [mm]	905
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Cable	transparent
Lifetime [h]	L80 B10 50 000
Ambient temperature	from -20° to +40°
Energy efficiency class	F
Number of luminaires B16A	26
Net weight [kg]	4.50
EAN number	9010870561625



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.