


CORBA

333-00048


CORBA SQ W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, high-efficiently vacuum deposited aluminium reflector without safety glass beam 36°, light output direct / indirect, max. 600mA, dimmability: DALI 2, IP65



SKETCH

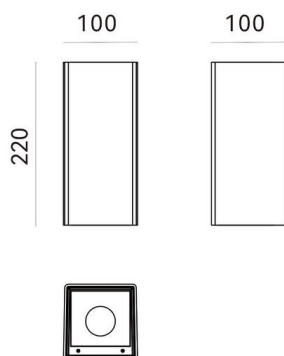

LIGHT DISTRIBUTION CURVE

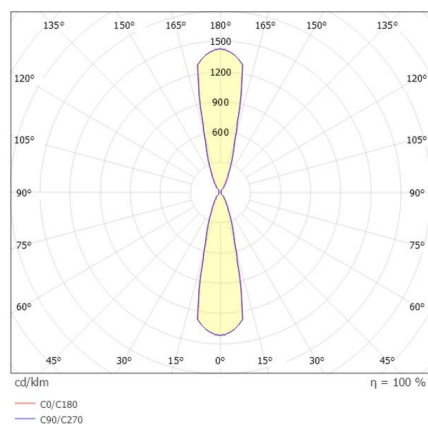

TECHNICAL DETAILS

Light source	LED
System performance [W]	24
Luminous flux [lm]	2345
Current sec. [mA]	600
Colour temperature	3000K
CRI	>90
Optics	aluminium reflector without protection glass
Dimmability	DALI 2
Light emission area	direct / indirect
Beam angle	36°
Voltage	220-240V 50/60Hz
Length [mm]	100
Width [mm]	100
Height [mm]	220
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK10
Material	aluminium
Colour of body	anthrazite
RAL	7016
Energy efficiency class	D
Number of luminaires B16A	94
Net weight [kg]	1.64
EAN number	9010870414297



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.