


## PERFORA

222-00076

PERFORA L PD SUSPENSION made of aluminium, black, similar to RAL 9005, polycarbonate cover beam 113°, light output direct, UGR <22, with converter, max. 1300mA, dimmability: DALI 2, Push, cable Tension control in the suspension ropes, adapter/ceiling base black, pendant length 3000mm, IP20




## SKETCH

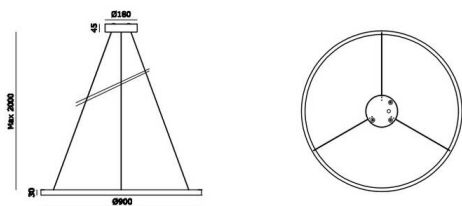

## TECHNICAL DETAILS

|                                  |                                         |
|----------------------------------|-----------------------------------------|
| Light source                     | LED                                     |
| System performance [W]           | 52                                      |
| Luminous flux [lm]               | 2760/2880                               |
| Current sec. [mA]                | 1300                                    |
| Colour temperature               | 2700/3000K                              |
| CRI                              | >90                                     |
| UGR                              | <22                                     |
| Optics                           | polycarbonate cover                     |
| Converter                        | with converter                          |
| Dimmability                      | DALI 2, Push                            |
| Light emission area              | direct                                  |
| Beam angle                       | 113°                                    |
| Voltage                          | 220-240V 50/60Hz                        |
| Height [mm]                      | 30                                      |
| Length pendant [mm]              | 3000                                    |
| Diameter [mm]                    | 900                                     |
| IP protection class              | IP20                                    |
| IP protection class              | protection cl. I                        |
| IK value                         | IK02                                    |
| Material                         | aluminium                               |
| Colour of body                   | black                                   |
| RAL                              | 9005                                    |
| Colour of adapter / ceiling base | black                                   |
| Cable                            | Tension control in the suspension ropes |
| Lifetime [h]                     | L80 B10 50 000                          |
| Energy efficiency class          | E                                       |
| Number of luminaires B16A        | 36                                      |
| Net weight [kg]                  | 2.90                                    |
| EAN number                       | 9010870314030                           |

## LIGHT DISTRIBUTION CURVE

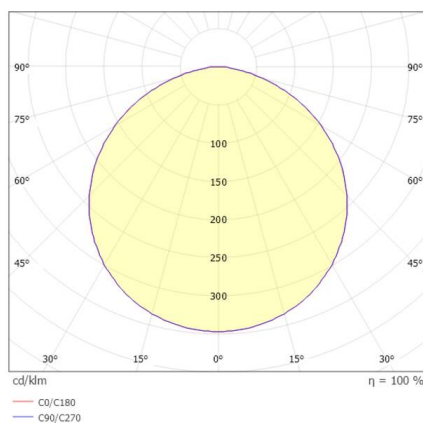

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.