



PERFORA

222-00076

PERFORA L PD SUSPENSION made of aluminium, black, similar to RAL 9005, polycarbonate cover beam 113°, light output direct, UGR <22, with converter, max. 1300mA, dimmability: DALI 2, Push, cable Tension control in the suspension ropes, adapter/ceiling base black, pendant length 3000mm, IP20

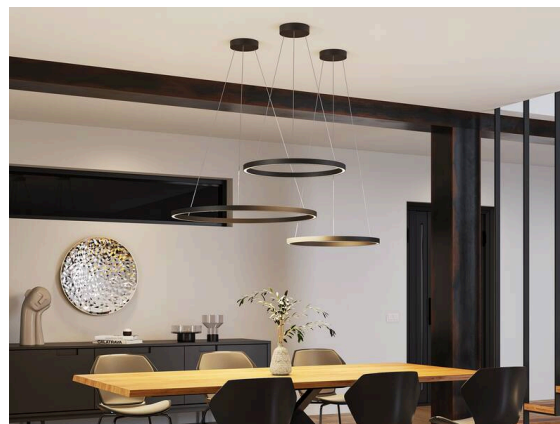


SKETCH

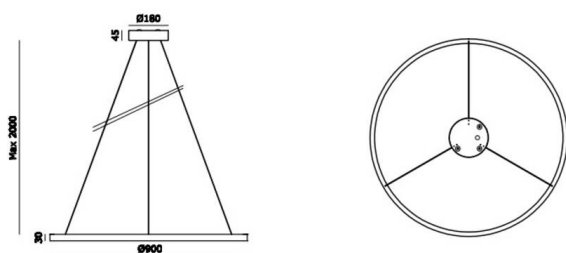

TECHNICAL DETAILS

Light source	LED
System performance [W]	52
Luminous flux [lm]	2760/2880
Current sec. [mA]	1300
Colour temperature	2700/3000K
CRI	>90
UGR	<22
Optics	polycarbonate cover
Converter	with converter
Dimmability	DALI 2, Push
Light emission area	direct
Beam angle	113°
Voltage	220-240V 50/60Hz
Height [mm]	30
Length pendant [mm]	3000
Diameter [mm]	900
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Cable	Tension control in the suspension ropes
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	36
Net weight [kg]	2.90
EAN number	9010870314030

LIGHT DISTRIBUTION CURVE

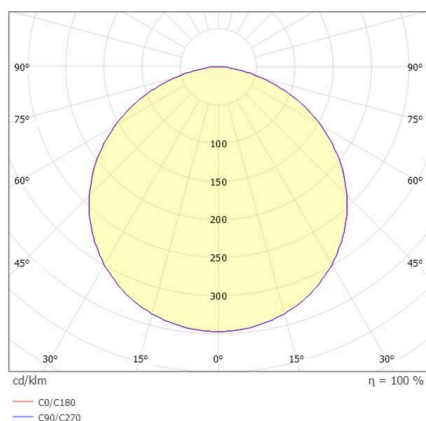

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.