


WADO

333-00051

WADO DOUBLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, high-efficiently vacuum deposited aluminium reflector without safety glass beam 36°, light output direct / indirect, UGR <19, with converter, max. 500mA, dimmability: on/off, IP65




SKETCH

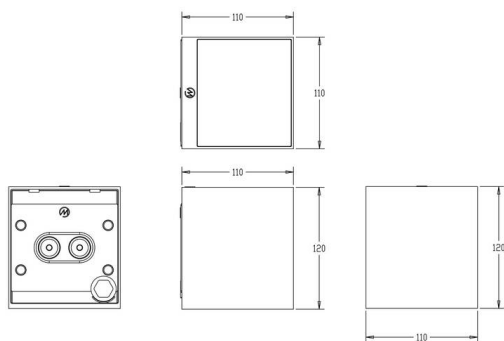

TECHNICAL DETAILS

Light source	LED
System performance [W]	20
Luminous flux [lm]	1890/2035
Current sec. [mA]	500
Colour temperature	2700/3000K
CRI	>90
UGR	<19
Optics	aluminium reflector without protection glass
Converter	with converter
Dimmability	on/off
Light emission area	direct / indirect
Beam angle	36°
Voltage	220-240V 50/60Hz
Length [mm]	110
Width [mm]	110
Height [mm]	120
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK06
Material	aluminium
Colour of body	anthrazite
RAL	7016
Lifetime [h]	L80 B10 50 000
Ambient temperature	-20° bis +45°
Energy efficiency class	D
Number of luminaires B16A	20
Net weight [kg]	1.42
EAN number	9010870451865

LIGHT DISTRIBUTION CURVE

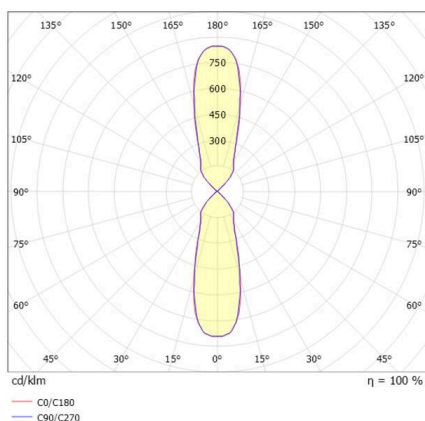

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.