## KODA

## 333-00059

KODA TEN STRETTO SURFACE MOUNTED WALL LUMINAIRE made of aluminium, white, similar to RAL 9003, light output direct / indirect, with converter, dimmability: on/off, IP44

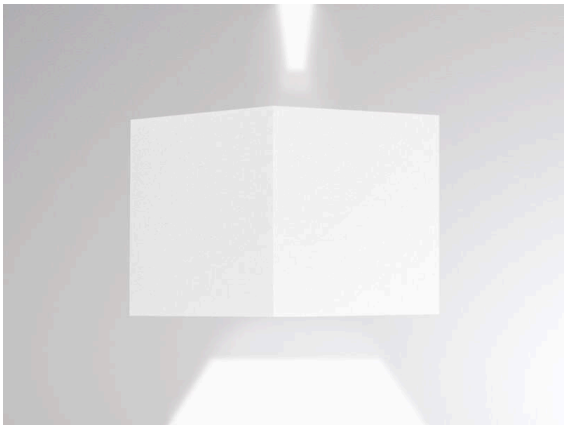



### Sketch




### Technical details

| | |
|---|---|
| Light source | LED |
| System performance [W] | 6 |
| Luminous flux [lm] | 96+17 |
| Colour temperature | 3000K |
| CRI | >80 |
| Converter | with converter |
| Dimmability | on/off |
| Light emission area | direct / indirect |
| Voltage | 220-240V 50/60Hz |
| | |
| Length [mm] | 100 |
| Width [mm] | 100 |
| Height [mm] | 100 |
| IP protection class | IP44 |
| IP protection class | protection cl. I |
| IK value | IK02 |
| | |
| Material | aluminium |
| Colour of body | white |
| RAL | 9003 |
| Lifetime [h] | L80 B10 50 000 |
| Ambient temperature | from 0° to +35° |
| Energy efficiency class | E |
| Number of luminaires B16A | 27 |
| | |
| Net weight [kg] | 1.00 |
| EAN number | 9010870572515 |

### Light distribution curve

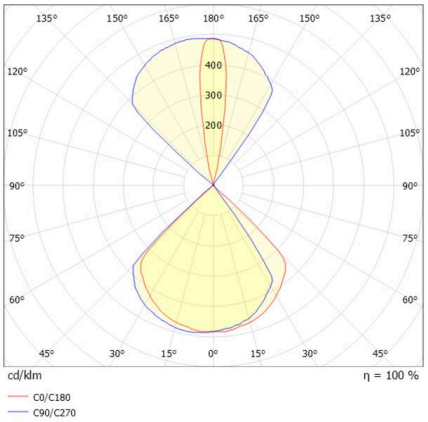


Energy label

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.