



**MOLTO OEM 175**

**175-036204623144e**

30NE EM DIFFUSER LUMINAIRE made of glass fibre reinforced polyester, grey, similar to RAL 7035, polycarbonate cover light output direct, UGR <25, with converter, dimmability: not dimmable, IP66 with emergency light 3 hours

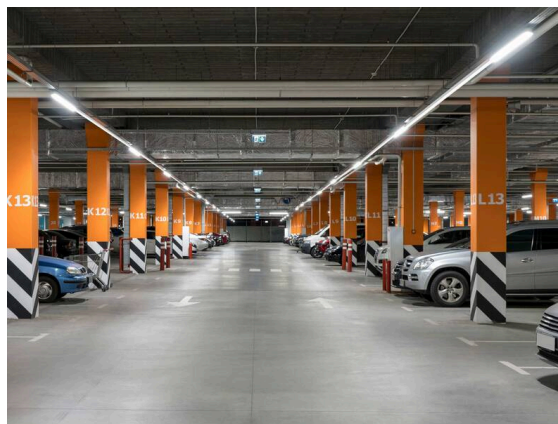


**SKETCH**

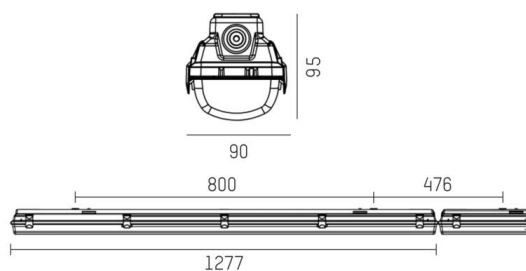

**TECHNICAL DETAILS**

Light source	LED
System performance [W]	31
Luminous flux [lm]	4600/420
Colour temperature	4000K
CRI	>80
UGR	<25
Optics	polycarbonate cover
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Voltage	220-240V 50/60Hz
Length [mm]	1277
Width [mm]	90
Height [mm]	95
IP protection class	IP66
IP protection class	protection cl. I
IK value	IK08
Material	glass fibre reinforced polyester
Colour of body	grey
RAL	7035
Lifetime [h]	L80 B10 50 000
Ambient temperature	from 0° to +35°
Energy efficiency class	D
Number of luminaires B16A	56
IFS	True
Net weight [kg]	1.75
EAN number	9010506635751

**LIGHT DISTRIBUTION CURVE**

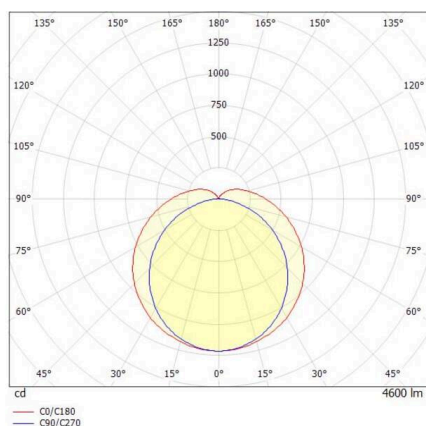

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.