


MOLTO OEM 175

175-036504023144e

30NE EM DIFFUSER LUMINAIRE made of glass fibre reinforced polyester, grey, similar to RAL 7035, polycarbonate cover light output direct, UGR <25, with converter, dimmability: not dimmable, IP66 with emergency light 3 hours




SKETCH

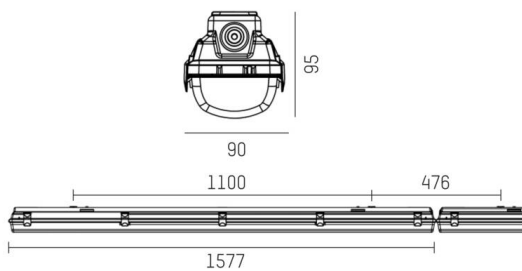

TECHNICAL DETAILS

| | |
|---------------------------|----------------------------------|
| Light source | LED |
| System performance [W] | 27 |
| Luminous flux [lm] | 4000/420 |
| Colour temperature | 4000K |
| CRI | >80 |
| UGR | <25 |
| Optics | polycarbonate cover |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct |
| Voltage | 220-240V 50/60Hz |
| Length [mm] | 1577 |
| Width [mm] | 90 |
| Height [mm] | 95 |
| IP protection class | IP66 |
| IP protection class | protection cl. I |
| IK value | IK08 |
| Material | glass fibre reinforced polyester |
| Colour of body | grey |
| RAL | 7035 |
| Lifetime [h] | L80 B10 50 000 |
| Ambient temperature | from 0° to +35° |
| Energy efficiency class | D |
| Number of luminaires B16A | 56 |
| IFS | True |
| Net weight [kg] | 2.08 |
| EAN number | 9010506633030 |

LIGHT DISTRIBUTION CURVE

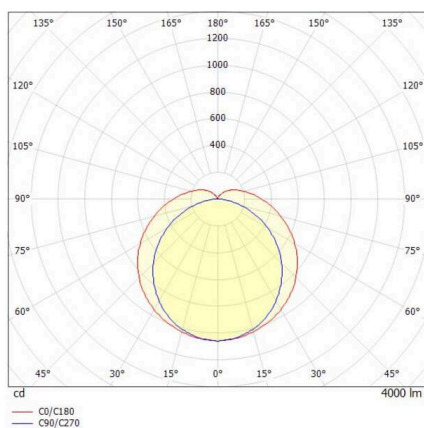

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.