


LONA

333-s00096


LONA F BOLLARD made of aluminium, anthrazite, similar to RAL 7016, lens white, beam 360°, accessoire: concrete anchor, light output direct, with converter, max. 300mA, dimmability: DALI, IP65

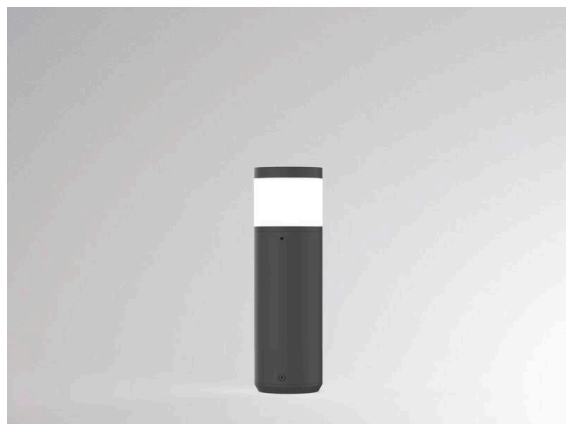

TECHNICAL DETAILS


Light source	LED
System performance [W]	11,5
Luminous flux [lm]	525
Current sec. [mA]	300
Colour temperature	3000K
CRI	>80
Optics	lens
Converter	with converter
Dimmability	DALI
Light emission area	direct
Beam angle	360°
Height [mm]	474
Diameter [mm]	90
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK08
Material	aluminium
Colour of body	anthrazite
RAL	7016
Colour of glass/shade	white
Lifetime [h]	50 000 L80 B10
Ambient temperature	from -30° to +45°
Energy efficiency class	A
Number of luminaires B16A	166
Net weight [kg]	1.95
EAN number	9010979311589

SKETCH



Energy label

LIGHT DISTRIBUTION CURVE

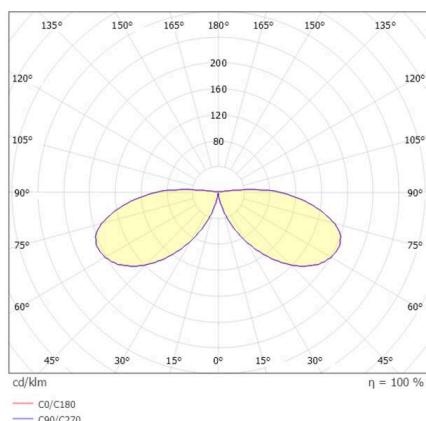

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.