


WALL 68R

222-00103


WALL 68R GLASS IP RECESSED WALL LUMINAIRE made of aluminium, white, similar to RAL 9003, satined glass beam asymmetric, light output direct, with converter, dimmability: on/off Multilumen, through wiring 3x1,5mm², IP44/IP20



SKETCH

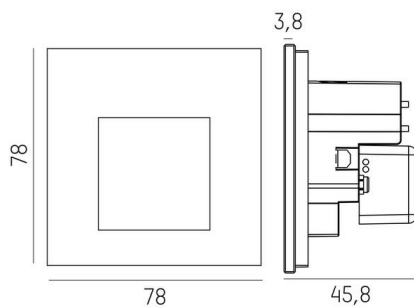

LIGHT DISTRIBUTION CURVE

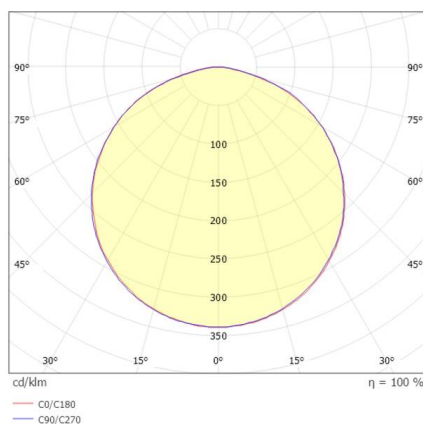

TECHNICAL DETAILS

Light source	LED
System performance [W]	4
Luminous flux [lm]	85
Colour temperature	2700K / 3000K / 4000K
CRI	>90
Optics	satined glass
Converter	with converter
Dimmability	on/off Multilumen
Light emission area	direct
Beam angle [°]	asymmetric
Voltage	220-240V 50/60Hz
Through wiring	3x1,5mm²
Length [mm]	78
Width [mm]	78
Height [mm]	45,8
Ceiling cutout [mm]	68
Mounting depth [mm]	60
IP protection class	IP44/IP20
IP protection class	protection cl. I
IK value	IK09
Material	aluminium
Colour of body	white
RAL	9003
Energy efficiency class	F
Number of luminaires B16A	56
Net weight [kg]	0.21
EAN number	9010870528024



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.