


WALL 68R

222-00104


WALL 68R GLASS IP RECESSED WALL LUMINAIRE made of aluminium, black, similar to RAL 9005, satined glass beam asymmetric, light output direct, with converter, dimmability: on/off Multilumen, through wiring 3x1,5mm², IP44/IP20



SKETCH

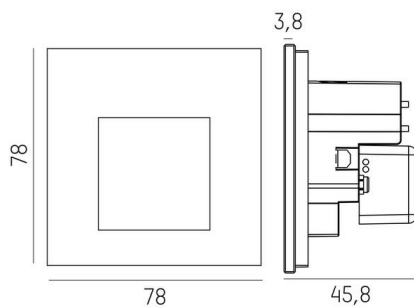

LIGHT DISTRIBUTION CURVE

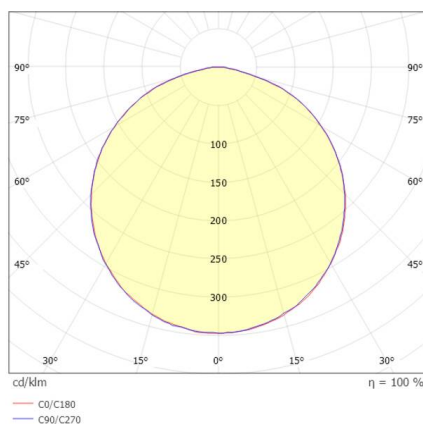

TECHNICAL DETAILS

Light source LED
 System performance [W] 4
 Luminous flux [lm] 50
 Colour temperature 2700K/3000K/4000K
 CRI >90
 Optics satined glass
 Converter with converter
 Dimmability on/off Multilumen
 Light emission area direct
 Beam angle [°] asymmetric
 Voltage 220-240V 50/60Hz
 Through wiring 3x1,5mm²

Length [mm] 78
 Width [mm] 78
 Height [mm] 45,8
 Ceiling cutout [mm] 68
 Mounting depth [mm] 60
 IP protection class IP44/IP20
 IK value protection cl. I
 IK09

Material aluminium
 Colour of body black
 RAL 9005
 Energy efficiency class F
 Number of luminaires B16A 56

Net weight [kg] 0.21
 EAN number 9010870528109



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.