


FORO

222-00325

FORO SHORT W SURFACE MOUNTED WALL LUMINAIRE black, similar to RAL 9005, light output direct / indirect, with converter, max. 350mA, dimmability: phase section, IP20



SKETCH




TECHNICAL DETAILS

Light source	LED
System performance [W]	4,5
Luminous flux [lm]	315/335
Current sec. [mA]	350
Colour temperature	2700/3000K
CRI	>90
Converter	with converter
Dimmability	phase section
Light emission area	direct / indirect
Voltage	220-240V 50/60Hz
Length [mm]	70
Width [mm]	60
Height [mm]	75
IP protection class	IP20
IP protection class	protection cl. I
Colour of body	black
RAL	9005
Ambient temperature	from 0° to +35°
Energy efficiency class	D
Number of luminaires B16A	222
Net weight [kg]	1.00
EAN number	9010979403437



Energy label

LIGHT DISTRIBUTION CURVE

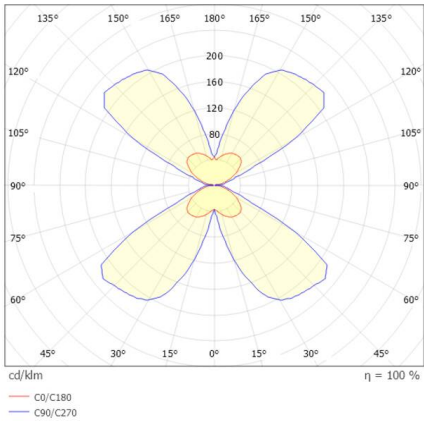

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.