



SUNRAY

222-00212

SUNRAY III R RECESSED DOWNLIGHT made of aluminium, white, similar to RAL 9003, high-efficiently vacuum deposited aluminium reflector beam 45°, light output direct, UGR <19, without converter, max. 350/500/700mA, dimmability: see converter, IP40/IP20

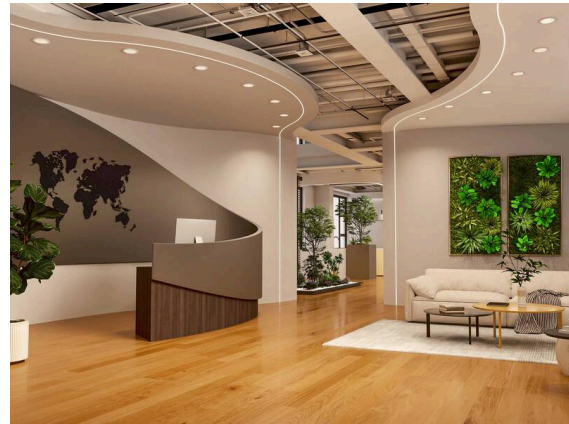


SKETCH

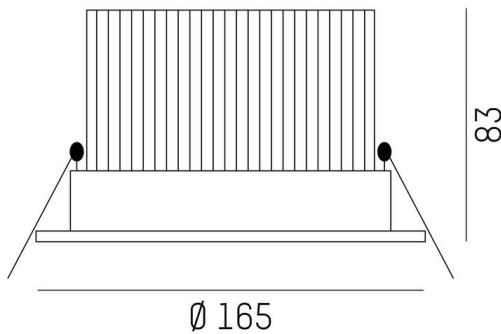

TECHNICAL DETAILS

Light source	LED 26W
Luminous flux [lm]	1650/2250/2850
Current sec. [mA]	350/500/700
Colour temperature	3000K
CRI	>80
UGR	<19
Optics	vacuum deposited aluminium reflector
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle [°]	45°
Voltage	37 VDC
Height [mm]	83
Diameter [mm]	165
Ceiling cutout [mm]	150
Ceiling thickness [mm]	max. 20mm
Mounting depth [mm]	113
IP protection class	IP40/IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 70 000
Energy efficiency class	E
Net weight [kg]	0.78
EAN number	9010870891388

LIGHT DISTRIBUTION CURVE

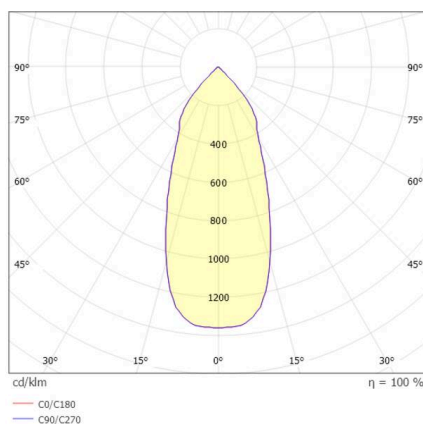

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.