


VUTO

222-00111


VUTO PD SUSPENSION made of aluminium, black lacquer, microprismatic PMMA cover for perfect anti-glare light output direct, with converter, dimmability: DALI 2, Push, cable black, adapter/ceiling base black lacquer, pendant length 4000mm, IP20



Sketch

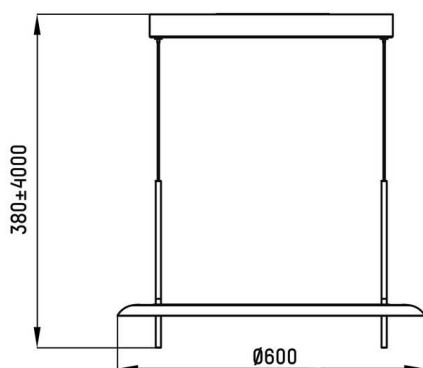

Light distribution curve

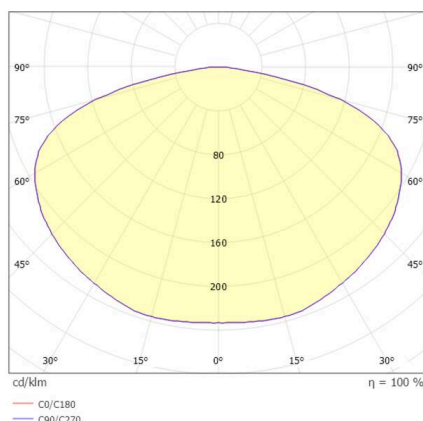

Technical details

Light source	LED
System performance [W]	34,5
Luminous flux [lm]	905
Colour temperature	2700K
CRI	>90
Optics	microprismatic cover
Converter	with converter
Dimmability	DALI 2, Push
Light emission area	direct
Voltage	220-240V 50/60Hz
Height [mm]	325
Length pendant [mm]	4000
Diameter [mm]	600
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black lacquer
Colour of adapter / ceiling base	black lacquer
Cable	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	F
Number of luminaires B16A	27
Net weight [kg]	4,00
EAN number	9010870568167



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.

Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.