


MIMO

333-00087

MIMO T TABLE LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, lens beam 30°, accessoire: Ladestation, light output direct, UGR <16, tilting 360°, dimmability: Touch Dim, IP54 Max. 12h autonomous operation,




SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	2,2
Luminous flux [lm]	50
Colour temperature	2700K
CRI	>80
UGR	<16
Optics	lens
Dimmability	Touch Dim
Light emission area	direct
Beam angle	30°
Voltage	220-240V 50/60Hz
Width [mm]	110
Height [mm]	358
Diameter [mm]	110
IP protection class	IP54
IP protection class	protection cl. III
Material	aluminium
Colour of body	anthrazite
RAL	7016
Energy efficiency class	E
Net weight [kg]	0.87
EAN number	9010979261211

LIGHT DISTRIBUTION CURVE

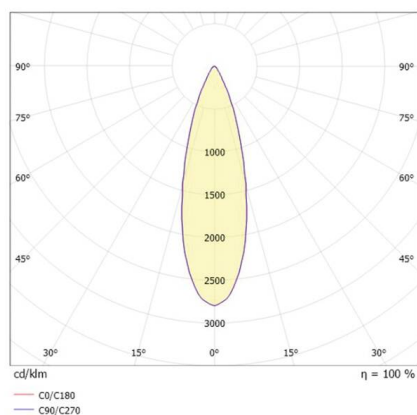

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.