

VINA

222-00220


VINA UP S W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black, similar to RAL 9005, beam 360°, light output direct, with converter, max. 500mA, dimmability: on/off, adapter/ceiling base black, IP44



TECHNICAL DETAILS


Light source	LED
System performance [W]	8,5
Luminous flux [lm]	475/505
Current sec. [mA]	500
Colour temperature	2700/3000K
CRI	90
Converter	with converter
Dimmability	on/off
Light emission area	direct
Beam angle	360°
Voltage	220-240V 50/60Hz
Length [mm]	400
Width [mm]	45
Height [mm]	86
Diameter [mm]	30
IP protection class	IP44
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	74
Net weight [kg]	0.66
EAN number	9010870963146

SKETCH

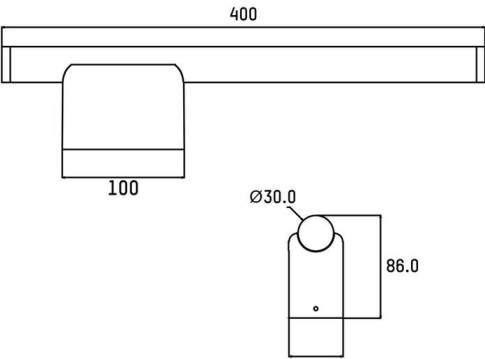

Energy label

LIGHT DISTRIBUTION CURVE

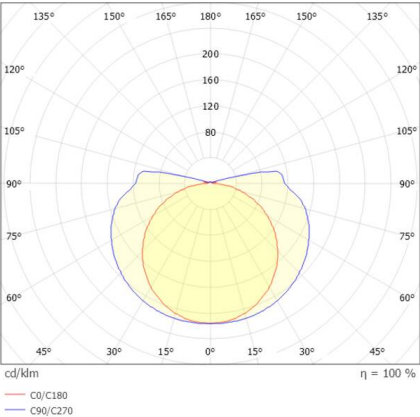

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.