


VINA

222-00222


VINA UP M W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black, similar to RAL 9005, beam 360°, light output direct, with converter, max. 350mA, dimmability: on/off, adapter/ceiling base black, IP44



SKETCH

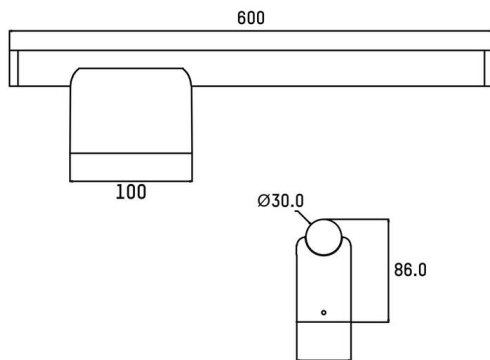

LIGHT DISTRIBUTION CURVE

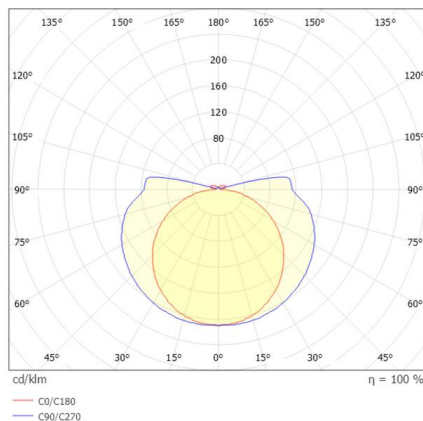

TECHNICAL DETAILS

Light source	LED
System performance [W]	13,5
Luminous flux [lm]	845/905
Current sec. [mA]	350
Colour temperature	2700/3000K
CRI	90
Converter	with converter
Dimmability	on/off
Light emission area	direct
Beam angle	360°
Voltage	220-240V 50/60Hz
Length [mm]	600
Width [mm]	45
Height [mm]	86
Diameter [mm]	30
IP protection class	IP44
IP protection class	protection cl. I
IK value	IK02
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	88
Net weight [kg]	0.80
EAN number	9010870963269



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.