

OLA

222-s00303

OLA | SD WALL / CEILING LUMINAIRE made of glass, black, similar to RAL 9005, white, beam 125°, light output direct, with converter, max. 500mA, dimmability: phase section, through wiring 3x1,5mm², adapter/ceiling base black, IP65



TECHNICAL DETAILS


Light source	LED
System performance [W]	6,5
Luminous flux [lm]	310/335/345
Current sec. [mA]	500
Colour temperature	2700K/3000K/4000K
CRI	>90
Converter	with converter
Dimmability	phase section
Light emission area	direct
Beam angle	125°
Voltage	220-240V 50Hz
Through wiring	3x1,5mm ²

Height [mm]	78
Diameter [mm]	132
IP protection class	IP65
IP protection class	protection cl. II
IK value	IK05

Material	glass
Colour of body	black
RAL	9005
Colour of glass/shade	white
Colour of adapter / ceiling base	black
Lifetime [h]	L80 B10 50 000
Ambient temperature	from 0° to +35°
Energy efficiency class	E
Number of luminaires B16A	224


Net weight [kg]	2.00
EAN number	9010979325623

SKETCH

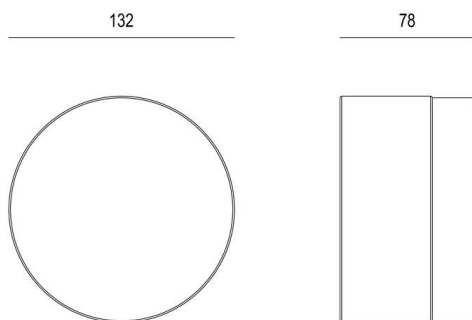

Energy label

LIGHT DISTRIBUTION CURVE

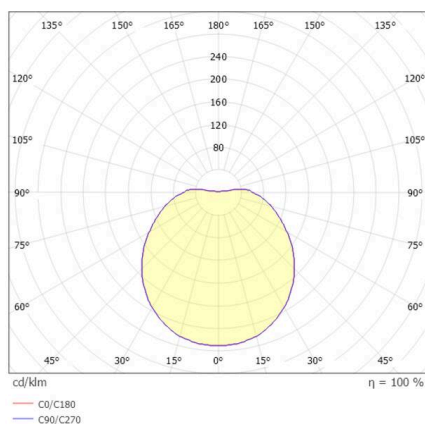

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.