

ZALUX

175-0945065231401


3ONE VISION DIFFUSER LUMINAIRE polycarbonate cover transparent, with multilumen power supply, dimmability: not dimmable, without motion detector, IP66 Lumens adjustable by means of DIP-SWITCH converter,



10316470

MF Pos	Flux (lm)	P (W)
0000	2500	16
0001	3000	19
0010	3500	22
0011	4000	25
0100	4300	28
0101	4800	30
0110	5200	33
0111	5600	36
1000	6000	39
1001	6500	41
1010	6900	44
1011	7400	49
1100	7800	51
1101	8200	54
1110	8600	57
1111	8800	60


SKETCH

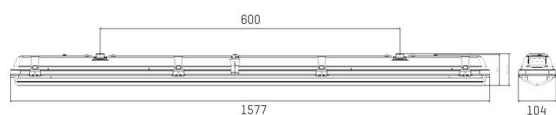

TECHNICAL DETAILS

Light source	LED
System performance [W]	41
Number of sockets	1x
Luminous flux [lm]	6500
Colour temperature	4000K
CRI	>80
Optics	polycarbonate cover
Converter	with multilumen power supply
Dimmability	not dimmable
Voltage	220-240V 50/60Hz
Motion detector	without motion detector
Length [mm]	1578
Width [mm]	101
Height [mm]	84
IP protection class	IP66
IP protection class	protection cl. I
IK value	IK08
Colour of glass/shade	transparent
Lifetime [h]	50 000
Ambient temperature	-25° bis +40°
Energy efficiency class	D
Net weight [kg]	1.80
EAN number	9010870343481

LIGHT DISTRIBUTION CURVE

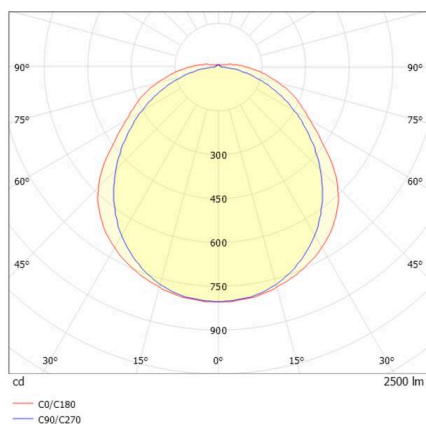

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.