



NUUN

222-00125

NUUN PD SUSPENSION made of aluminium, black coffee, similar to RAL 9005, lens beam 60°, light output direct, UGR <28, swiveling 120°, tilting 90°, with converter, max. 600mA, dimmability: DALI 2, Push, adapter/ceiling base black, pendant length 2500mm, IP20

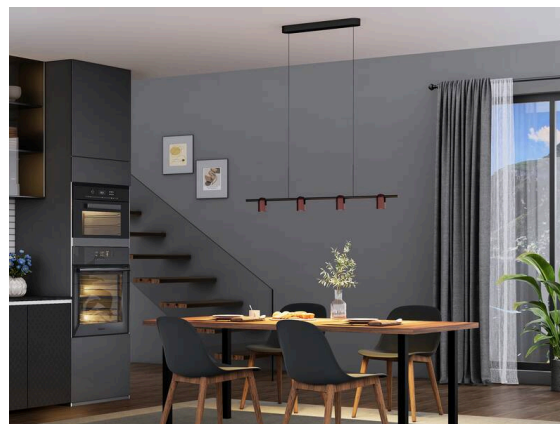


SKETCH

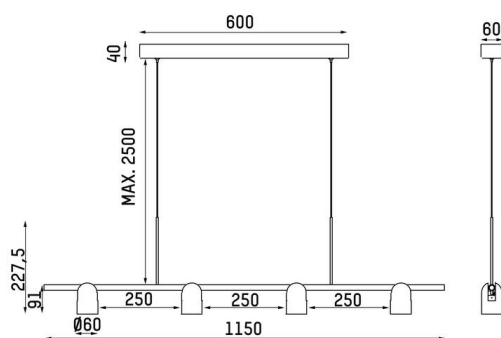

TECHNICAL DETAILS

Light source	LED
System performance [W]	23
Luminous flux [lm]	1880
Current sec. [mA]	600
Colour temperature	2700/3000K
CRI	>90
UGR	<28
Optics	lens
Converter	with converter
Dimmability	DALI 2, Push
Light emission area	direct
Beam angle	60°
Voltage	220-240V 50/60Hz
Length [mm]	1150
Width [mm]	60
Height [mm]	90
Length pendant [mm]	2500
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black coffee
RAL	9005
Colour of adapter / ceiling base	black
Energy efficiency class	F
Number of luminaires B16A	77
Net weight [kg]	3.00
EAN number	9010870534759

LIGHT DISTRIBUTION CURVE

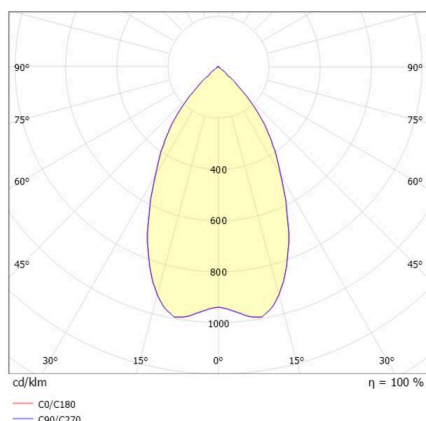

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.