


ZALUX

175-094506723140d

30NE VISION DIFFUSER LUMINAIRE polycarbonate cover transparent, with converter, dimmability: DALI, without motion detector, IP66




SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	44
Number of sockets	1x
Luminous flux [lm]	6700
Colour temperature	4000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimmability	DALI
Voltage	220-240V 50/60Hz
Motion detector	without motion detector
Length [mm]	1577
Width [mm]	104
Height [mm]	84
IP protection class	IP66
IP protection class	protection cl. I
IK value	IK08
Colour of glass/shade	transparent
Lifetime [h]	50 000
Ambient temperature	-25° bis +40°
Energy efficiency class	D
Net weight [kg]	1.80
EAN number	9010870312678

LIGHT DISTRIBUTION CURVE

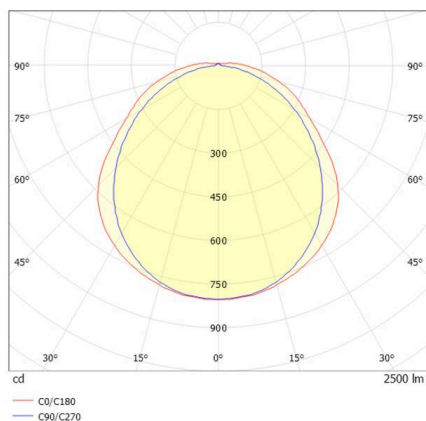

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.