
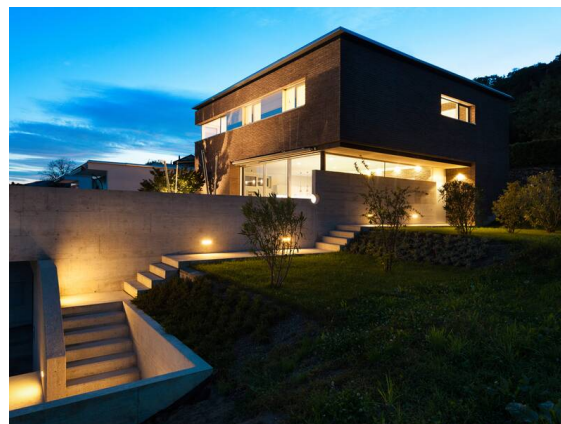



WALL OUT

333-s00120

WALL OUT R | RECESSED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, beam asymmetric, light output direct, with converter, IP65

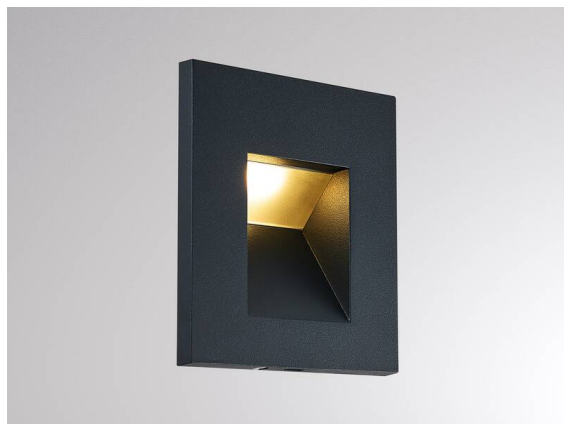

SKETCH

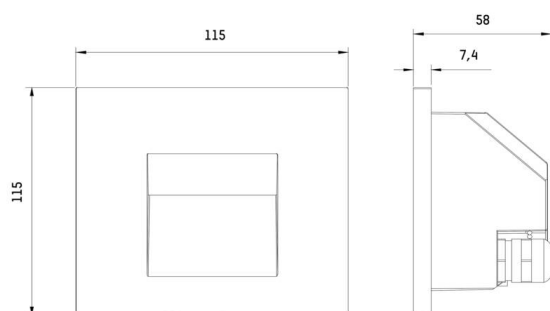

TECHNICAL DETAILS


Light source LED
 System performance [W] 4
 Luminous flux [lm] 120/130/130
 Colour temperature 2700K/3000K/4000K
 CRI >90
 Converter with converter
 Light emission area direct
 Beam angle asymmetric
 Voltage 220-240V 50/60Hz

Length [mm] 115
 Width [mm] 115
 Height [mm] 58
 Ceiling cutout [mm] 115x115
 Mounting depth [mm] 85
 IP protection class IP65
 IK value IK04

Material aluminium
 Colour of body anthrazite
 RAL 7016
 Lifetime [h] L80 B10 50 000
 Ambient temperature from -30° to +45°
 Energy efficiency class F
 Number of luminaires B16A 56

Net weight [kg] 0.48
 EAN number 9010979421868

LIGHT DISTRIBUTION CURVE

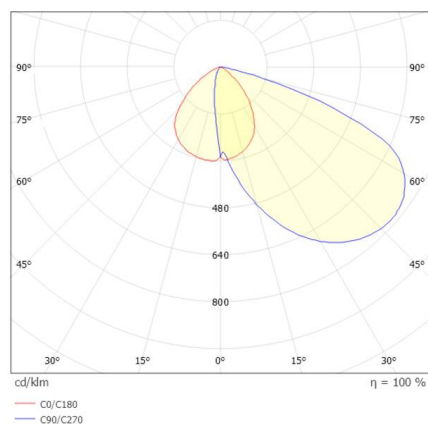

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.