

# LORA 2

222-s00343

LORA 1 PD SUSPENSION brass,lens beam 40°, light output direct, UGR <28, with converter, max. 500mA, dimmability: phase section, adapter/ceiling base black, pendant length 3000mm, IP20




## TECHNICAL DETAILS

|                        |                  |
|------------------------|------------------|
| Light source           | LED              |
| System performance [W] | 9,5              |
| Luminous flux [lm]     | 730/800          |
| Current sec. [mA]      | 500              |
| Colour temperature     | 2700/3000K       |
| CRI                    | >90              |
| UGR                    | <28              |
| Optics                 | lens             |
| Converter              | with converter   |
| Dimmability            | phase section    |
| Light emission area    | direct           |
| Beam angle             | 40°              |
| Voltage                | 220-240V 50Hz    |
| Height [mm]            | 170              |
| Length pendant [mm]    | 3000             |
| Diameter [mm]          | 152              |
| IP protection class    | IP20             |
| IP protection class    | protection cl. I |


|                                  |                 |
|----------------------------------|-----------------|
| Colour of body                   | brass           |
| Colour of adapter / ceiling base | black           |
| Lifetime [h]                     | L80 B10 50 000  |
| Ambient temperature              | from 0° to +35° |
| Energy efficiency class          | E               |
| Number of luminaires B16A        | 200             |
| Net weight [kg]                  | 2.00            |
| EAN number                       | 9010979427136   |

## SKETCH



Energy label

## LIGHT DISTRIBUTION CURVE

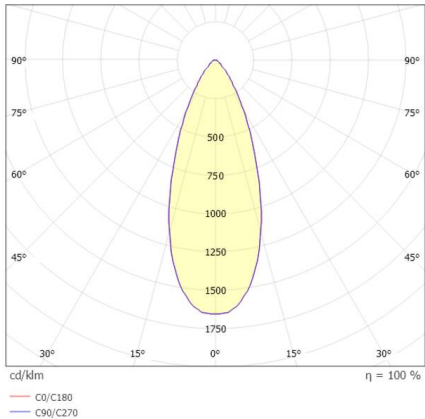

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.