

ELOFIX

222-00234

ELOFIX WALL / CEILING LUMINAIRE white, similar to RAL 9016, beam 130°, light output direct, UGR <28, max. 350mA, dimmability: on/off, IP20



TECHNICAL DETAILS

Light source	LED
System performance [W]	46
Luminous flux [lm]	6415/6990/6885
Current sec. [mA]	350
Colour temperature	3000K/4000K/5000K
CRI	>80
UGR	<28
Dimmability	on/off
Light emission area	direct
Beam angle	130°
Voltage	220-240V 50/60Hz

Length [mm]	1450
Width [mm]	56
Height [mm]	68
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK04


Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 100 000
Ambient temperature	from -20° to +40°
Energy efficiency class	D
Number of luminaires B16A	24

Net weight [kg]	1.40
EAN number	9010979526730




Energy label

SKETCH

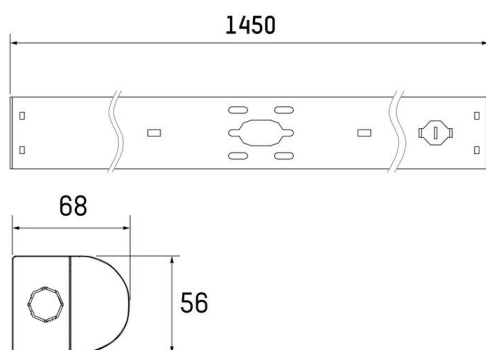

LIGHT DISTRIBUTION CURVE

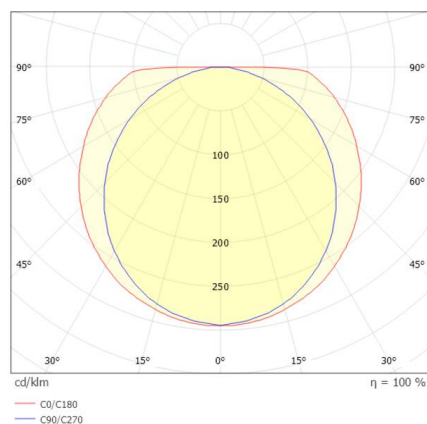

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.