

## ELOFIX

222-00235

ELOFIX WALL / CEILING LUMINAIRE white, similar to RAL 9016, beam 130°, light output direct, UGR <28, max. 350mA, dimmability: DALI 2, IP20



## TECHNICAL DETAILS

|                        |                   |
|------------------------|-------------------|
| Light source           | LED               |
| System performance [W] | 36                |
| Luminous flux [lm]     | 4695/5040/4980    |
| Current sec. [mA]      | 350               |
| Colour temperature     | 3000K/4000K/5000K |
| CRI                    | >80               |
| UGR                    | <28               |
| Dimmability            | DALI 2            |
| Light emission area    | direct            |
| Beam angle             | 130°              |
| Voltage                | 220-240V 50/60Hz  |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 1150             |
| Width [mm]          | 56               |
| Height [mm]         | 68               |
| IP protection class | IP20             |
| IP protection class | protection cl. I |
| IK value            | IK04             |


|                           |                   |
|---------------------------|-------------------|
| Colour of body            | white             |
| RAL                       | 9016              |
| Lifetime [h]              | L80 B10 100 000   |
| Ambient temperature       | from -20° to +40° |
| Energy efficiency class   | D                 |
| Number of luminaires B16A | 27                |

|                 |               |
|-----------------|---------------|
| Net weight [kg] | 1.00          |
| EAN number      | 9010979526754 |




Energy label

## SKETCH

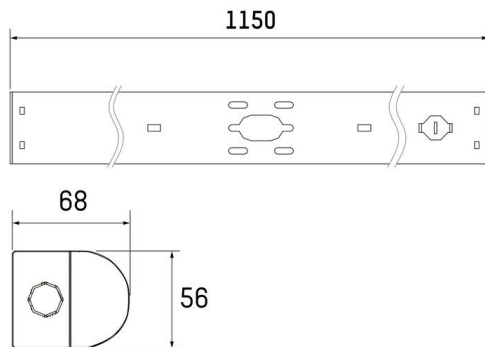

## LIGHT DISTRIBUTION CURVE

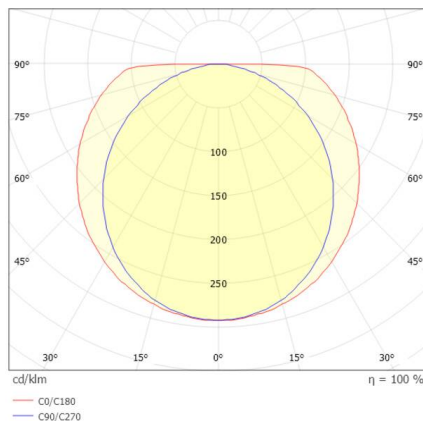

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.