

NELL

333-00105


NELL DOUBLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black, similar to RAL 9005, lens beam 80°, light output direct / indirect, UGR <22, with converter, max. 350mA, dimmability: not dimmable, IP65



TECHNICAL DETAILS


Light source	LED
System performance [W]	5
Luminous flux [lm]	380
Current sec. [mA]	350
Colour temperature	3000K
CRI	>90
UGR	<22
Optics	lens
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Beam angle	80°
Voltage	220-240V 50/60Hz
Width [mm]	88
Diameter [mm]	100
IP protection class	IP65
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 20 000
Energy efficiency class	F
Number of luminaires B16A	112
Net weight [kg]	1.08
EAN number	9010979367852

SKETCH

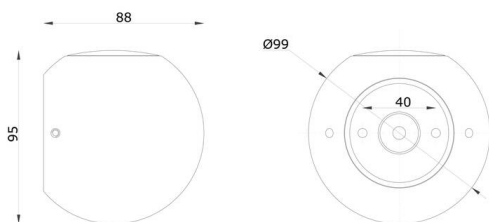

Energy label

LIGHT DISTRIBUTION CURVE

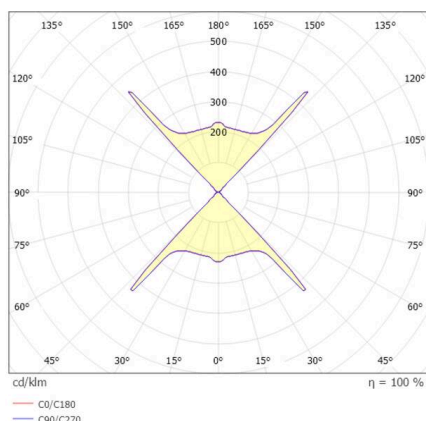

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.