

ELOFIX

222-00236


ELOFIX WALL / CEILING LUMINAIRE white, similar to RAL 9016, beam 130°, light output direct, UGR <28, max. 350mA, dimmability: DALI 2, IP20



TECHNICAL DETAILS


Light source	LED
System performance [W]	48
Luminous flux [lm]	6480/7060/7015
Current sec. [mA]	350
Colour temperature	3000K/4000K/5000K
CRI	>80
UGR	<28
Dimmability	DALI 2
Light emission area	direct
Beam angle	130°
Voltage	220-240V 50/60Hz
Length [mm]	1450
Width [mm]	56
Height [mm]	68
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK04
Colour of body	white
RAL	9016
Lifetime [h]	L80 B10 100 000
Ambient temperature	from -20° to +40°
Energy efficiency class	D
Number of luminaires B16A	20
Net weight [kg]	1.20
EAN number	9010979557413

SKETCH

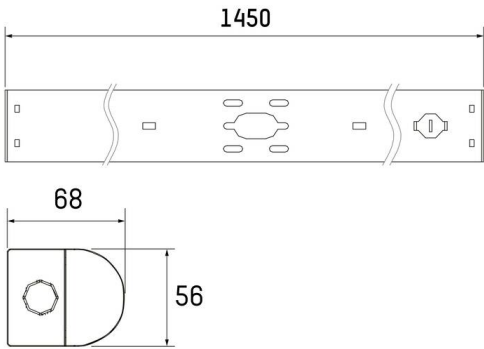

Energy label

LIGHT DISTRIBUTION CURVE

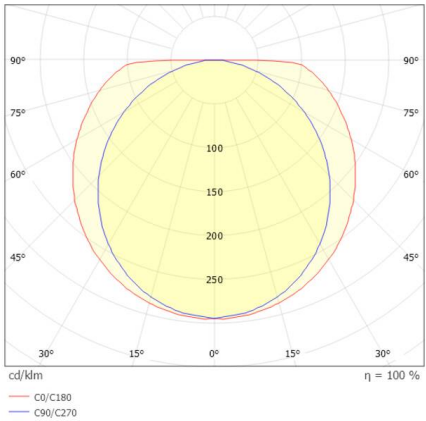

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.