

# NELL

333-00106


NELL DOUBLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, white, similar to RAL 9003, lens beam 80°, light output direct / indirect, UGR <22, with converter, max. 300mA, dimmability: not dimmable, IP65



## TECHNICAL DETAILS


|                           |                   |
|---------------------------|-------------------|
| Light source              | LED               |
| System performance [W]    | 5                 |
| Luminous flux [lm]        | 380               |
| Current sec. [mA]         | 300               |
| Colour temperature        | 3000K             |
| CRI                       | >90               |
| UGR                       | <22               |
| Optics                    | lens              |
| Converter                 | with converter    |
| Dimmability               | not dimmable      |
| Light emission area       | direct / indirect |
| Beam angle                | 80°               |
| Voltage                   | 220-240V 50/60Hz  |
| Width [mm]                | 88                |
| Diameter [mm]             | 100               |
| IP protection class       | IP65              |
| IP protection class       | protection cl. I  |
| Material                  | aluminium         |
| Colour of body            | white             |
| RAL                       | 9003              |
| Lifetime [h]              | L80 B10 20 000    |
| Energy efficiency class   | F                 |
| Number of luminaires B16A | 112               |
| Net weight [kg]           | 1.08              |
| EAN number                | 9010979367869     |

## SKETCH

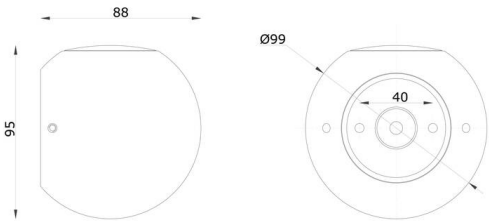

Energy label

## LIGHT DISTRIBUTION CURVE

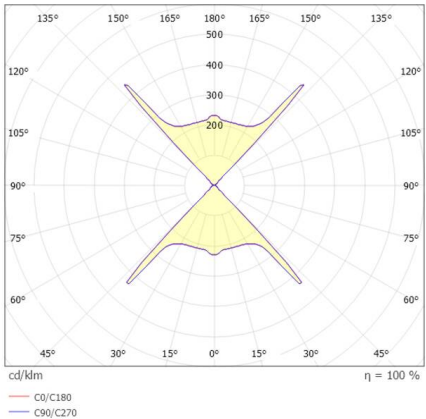

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.