


LORA 2

222-s00347


LORA 3 PD SUSPENSION brass, lens beam 40°, light output direct, UGR <28, with converter, max. 500mA, dimmability: phase section, adapter/ceiling base black, pendant length 3000mm, IP20



SKETCH

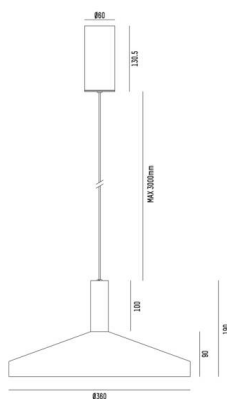

LIGHT DISTRIBUTION CURVE

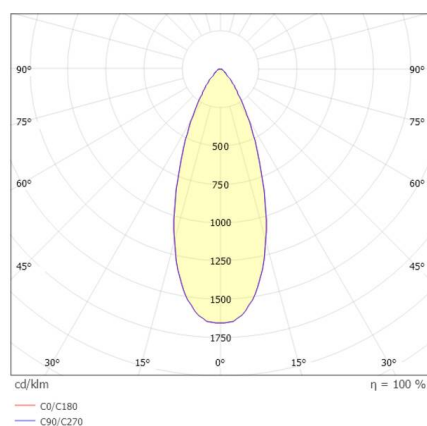

TECHNICAL DETAILS

Light source LED
 System performance [W] 9,5
 Luminous flux [lm] 730/800
 Current sec. [mA] 500
 Colour temperature 2700/3000K
 CRI >90
 UGR <28
 Optics lens
 Converter with converter
 Dimmability phase section
 Light emission area direct
 Beam angle 40°
 Voltage 220-240V 50Hz

Height [mm] 89
 Length pendant [mm] 3000
 Diameter [mm] 360
 IP protection class IP20
 IP protection class protection cl. I

Colour of body brass
 Colour of adapter / ceiling base black
 Lifetime [h] L80 B10 50 000
 Ambient temperature from 0° to +35°
 Energy efficiency class E
 Number of luminaires B16A 200

Net weight [kg] 2.00
 EAN number 9010979427143



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.