


# LORA 2

222-s00348

LORA 1 PD TRACK SUSPENSION WITH 3-PH ADAPTER black, similar to RAL 9005, lens beam 40°, light output direct, UGR <28, with converter, max. 500mA, dimmability: on/off, adapter/ceiling base black, pendant length 3000mm, IP20



## SKETCH

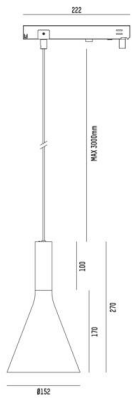


## TECHNICAL DETAILS

|                                  |                   |
|----------------------------------|-------------------|
| Light source                     | LED               |
| System performance [W]           | 9                 |
| Luminous flux [lm]               | 700/760           |
| Current sec. [mA]                | 500               |
| Colour temperature               | 2700/3000K        |
| CRI                              | >90               |
| UGR                              | <28               |
| Optics                           | lens              |
| Converter                        | with converter    |
| Dimmability                      | on/off            |
| Light emission area              | direct            |
| Beam angle                       | 40°               |
| Voltage                          | 220-240V 50Hz     |
| Length [mm]                      | 3000              |
| Height [mm]                      | 170               |
| Length pendant [mm]              | 3000              |
| Diameter [mm]                    | 152               |
| IP protection class              | IP20              |
| IP protection class              | protection cl. II |
| Colour of body                   | black             |
| RAL                              | 9005              |
| Colour of adapter / ceiling base | black             |
| Lifetime [h]                     | L80 B10 50 000    |
| Ambient temperature              | from 0° to +35°   |
| Energy efficiency class          | E                 |
| Number of luminaires B16A        | 53                |
| Net weight [kg]                  | 2.00              |
| EAN number                       | 9010979427174     |



Energy label

## LIGHT DISTRIBUTION CURVE

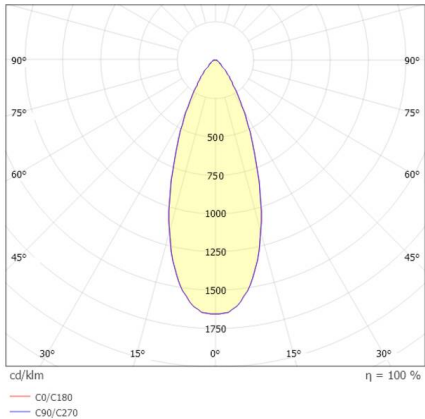

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.