


LUMERO+

222-00363

ELIX 60 LIGHT INSERT made of aluminium, white, similar to RAL 9016, high-efficiently vacuum deposited synthetic reflector beam 45°, light output direct, swiveling 355, tilting 90, without converter, dimmability: see converter, IP20




SKETCH

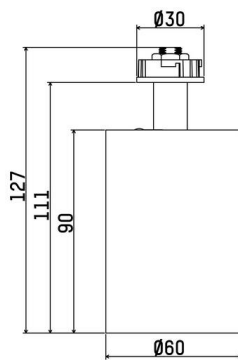

TECHNICAL DETAILS

Light source	LED 9W
Luminous flux [lm]	870
Colour temperature	3000K
CRI	>90
Optics	vacuum deposited synthetic reflector
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	45°
Height [mm]	90
Diameter [mm]	60
IP protection class	IP20
IP protection class	protection cl. III
IK value	IK02
Material	aluminium
Colour of body	white
RAL	9016
Lifetime [h]	50 000 L80 B10
Ambient temperature	-20° bis +45°
Energy efficiency class	E
Net weight [kg]	1.00
EAN number	9010979441453

LIGHT DISTRIBUTION CURVE

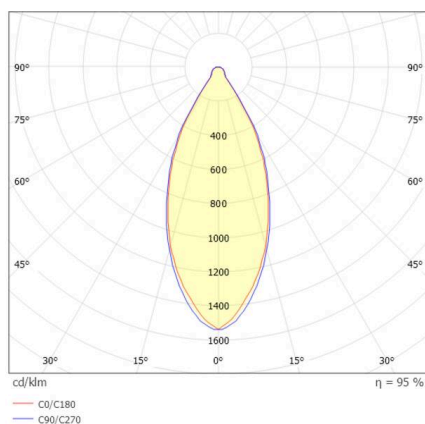

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.