



## LORA 2

222-s00351

LORA 2 PD TRACK SUSPENSION WITH 3-PH ADAPTER brass, lens beam 40°, light output direct, UGR <28, with converter, max. 500mA, dimmability: on/off, adapter/ceiling base black, pendant length 3000mm, IP20

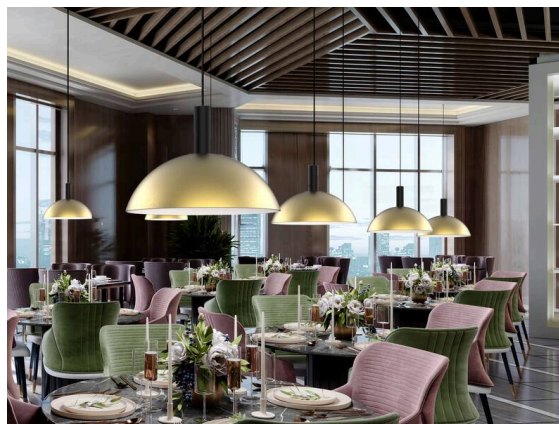

## LIGHT DISTRIBUTION CURVE

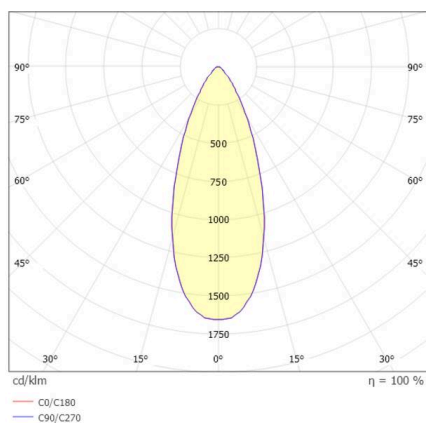

## TECHNICAL DETAILS

Light source	LED
System performance [W]	9
Luminous flux [lm]	700/760
Current sec. [mA]	500
Colour temperature	2700/3000K
CRI	>90
UGR	<28
Optics	lens
Converter	with converter
Dimmability	on/off
Light emission area	direct
Beam angle	40°
Voltage	220-240V 50Hz
Length [mm]	3000
Height [mm]	67,3
Length pendant [mm]	3000
Diameter [mm]	240
IP protection class	IP20
IP protection class	protection cl. II
Colour of body	brass
Colour of adapter / ceiling base	black
Lifetime [h]	L80 B10 50 000
Ambient temperature	from 0° to +35°
Energy efficiency class	E
Number of luminaires B16A	53
Net weight [kg]	2.00
EAN number	9010979427259



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.