DESCO PRO


222-00242

DESCO PRO M SDI WALL / CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005,satined PMMA opal diffuser beam 118°, light output direct / indirect, with converter, max. 600mA, dimmability: DALI 2, Push, adapter/ceiling base black, IP54






Sketch

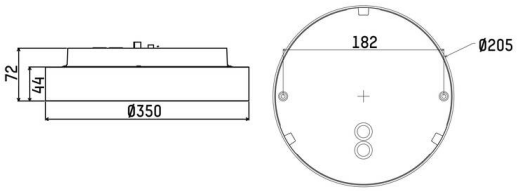

Technical details

Light source	LED
System performance [W]	22,5
Luminous flux [lm]	2250/2325/2350
Current sec. [mA]	600
Colour temperature	2700K/3000K/4000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimmability	DALI 2, Push
Light emission area	direct / indirect
Beam angle	118°
Voltage	220-240V 50/60Hz
Height [mm]	72
Diameter [mm]	350
IP protection class	IP54
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Lifetime [h]	L80 B10 50 000
Ambient temperature	from -20° to +40°
Energy efficiency class	C
Number of luminaires B16A	106
Net weight [kg]	1.80
EAN number	9010870341586

Light distribution curve

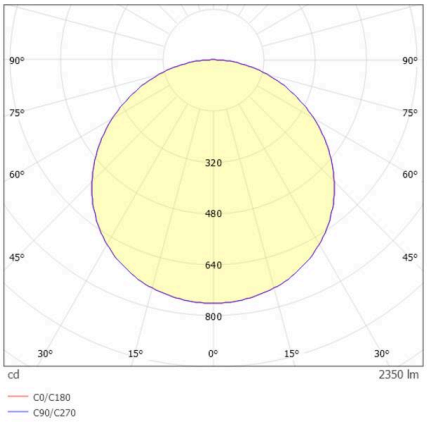

Energy label

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.